



FLEXITALY[®]
ITALIAN FLEXIBLE HOSES

2026 CATALOGO
CATALOGUE

Since 1986
MADE IN ITALY





2026

PRICE LIST



Dal 1986
MADE IN ITALY





2026

L'AZIENDA
THE COMPANY

04

FLESSIBILI DN6
DN6 FLEXIBLES

16

FLESSIBILI DN8 PER RUBINETTERIA
DN8 FLEXIBLES FOR FAUCETS

18

FLESSIBILI DN8
DN8 FLEXIBLES

22

FLESSIBILI DN10
DN10 FLEXIBLES

26

FLESSIBILI DN13
DN13 FLEXIBLES

30

FLESSIBILI ANTIVIBRANTI
ANTI-VIBRATION FLEXIBLE HOSES

34

FLESSIBILI ANTIVIBRANTI INOX
STAINLESS STEEL ANTI-VIBRATION FLEXIBLES

38

MANICHETTE GAS GPL
LPG GAS FLEXIBLE HOSES

42

FLESSIBILI DOCCIA
SHOWER FLEXIBLE HOSES

44

FLESSIBILI DOCCIA ESTRAIBILE
PULL-OUT FLEXIBLE HOSES

48

FLESSIBILI PER MONOFORO
ONE-HOLE MIXERS FLEXIBLE HOSES

52

FLESSIBILI DOCCIA CROMATI
CHROME PLATED SHOWER HOSES

54

FLESSIBILI PER CARICO LAVATRICE IN ACCIAIO INOX
STAINLESS STEEL WASHING MACHINE INLET FLEXIBLE HOSES

56

FLESSIBILI PER CARICO LAVATRICE IN PVC
PVC WASHING MACHINE INLET FLEXIBLE HOSES

57

RACCORDERIA IN OTTONE E TUBI IN RAME
BRASS FITTINGS AND COPPER TUBES

60

ISTRUZIONI DI MONTAGGIO
INSTRUCTIONS

66

CONDIZIONI GENERALI DI VENDITA
GENERAL TERMS AND SALES CONDITIONS

68

L'AZIENDA - THE COMPANY

La FLEXITALY s.r.l. nasce a Cassano nel 1986 come azienda specializzata nella produzione di tubo tracciato e flessibili per l'idraulica.

In oltre 25 anni, Flexitaly si è sviluppata da realtà semi-artigianale in attività industriale grazie alla riconosciuta qualità del proprio prodotto ed agli investimenti in macchinari ed automazione per un costante miglioramento del ciclo produttivo, della qualità dei componenti, della velocità di consegna e della sicurezza e garanzia del prodotto.

Situata su un'area di circa 5000 mq comprende diversi reparti produttivi con svariati macchinari a chiusura del ciclo prodotto:

- Produzione interna di tutte le minuterie in ottone, tramite due importanti reparti di torneria uno dotato di 25 torni a controllo numerico con passaggio barra fino a 65 mm e l'altro di macchine transfer con carico simultaneo di due barre (esegue due pezzi per volta) quindi ad alta velocità e fortissima resa in precisione, tutti macchinari italiani e di ultimissima generazione.

- Produzione interna di articoli da stampato, tramite un reparto dotato di centri di lavoro asserviti da robot per le lavorazioni di tornitura dei prodotti stampati.

- Reparto di bobinatura e trecciatura ad alta capacità produttiva. Il nostro stabilimento è dotato di un reparto ad alta capacità dedicato alla bobinatura e trecciatura, in grado di lavorare diverse tipologie di materiali tra cui acciaio inox AISI 304, nylon 6.6, acciaio zincato e polietilene.

- Reparto di produzione automatica di flessibili:
 - macchine assemblatrici automatiche con capacità produttiva di oltre 30.000 pezzi/giorno
 - macchine semiautomatiche.
 - taglierine automatiche

L'azienda, ora Leader nel settore, è da sempre attenta alla qualità delle materie prime, dei cicli produttivi e del prodotto finito, rendendo un servizio al passo con le esigenze di mercato in termini di professionalità, flessibilità produttiva, qualità, affidabilità, velocità di consegna e ottimo grado di soddisfazione delle diverse esigenze della clientela italiana ed internazionale.

L'azienda è certificata per un sistema di gestione qualità relativo alla progettazione e produzione di tubi trecciati e attacchi flessibili in conformità alla norma EN ISO 9001:2000 rilasciata dall'ente tedesco Tüv Thüringen.

FLEXITALY s.r.l. was born in Cassano d'Adda in 1986 as a company specialized in the production of braided flexibles hoses for plumbing.

In more than 25 years, Flexitaly turned from a semi-craft reality into the industrial activity thanks to the recognized quality of its product and the investment in machinery and automation for a constant improvement of the production cycle, the quality of the components, the speed of delivery and the product safety and warranty.

Located on a comprising area of approximately 5000 sqm includes different departments with several machineries to complete the product cycle:

- Internal production of all the fittings, through an important turnery department equipped with 25 numerical control lathes with bar passage up to 1"1/4, all italians and of the latest generation, able to work simultaneously on multiple stations (carrying out different workings simultaneously in order to decrease production times), on single bar (producing one piece at a time) or on double bar (producing two pieces at a time) then at high speed production and strong results in accuracy.

- Internal production of molded articles through a department equipped with robotized work centers for the turning operations of molded products.

- High-Capacity Winding and Braiding Department. capable of processing a wide range of materials, including AISI 304 stainless steel, nylon 6.6, galvanized steel, and polyethylene.

- Department for the automatic production of flexible hoses:

- automatic flexibles assembling machines with production capacity of over 30,000 pieces/day,
- Semi- automatic machines
- Automatic cut-machines


The company, now Leader in this field, has always been focused on the quality of raw materials, of production cycles and of the final product providing a service that meets the demands of the market in terms of professionalism, production flexibility, quality, reliability and speed of delivery and very high satisfaction level of the different needs of its italian and international customers.

FLEXITALY is certified as a quality management system concerning the designing and production of braided tubes and flexibles fittings in compliance with EN ISO 9001:2000 released from the German agency Tüv Thüringen.

ENGINEERING

Progettazione, sviluppo e produzione di raccorderie e componenti destinate all'assemblaggio di flessibili.

Design and development of fittings and flexible components for hose assembly.

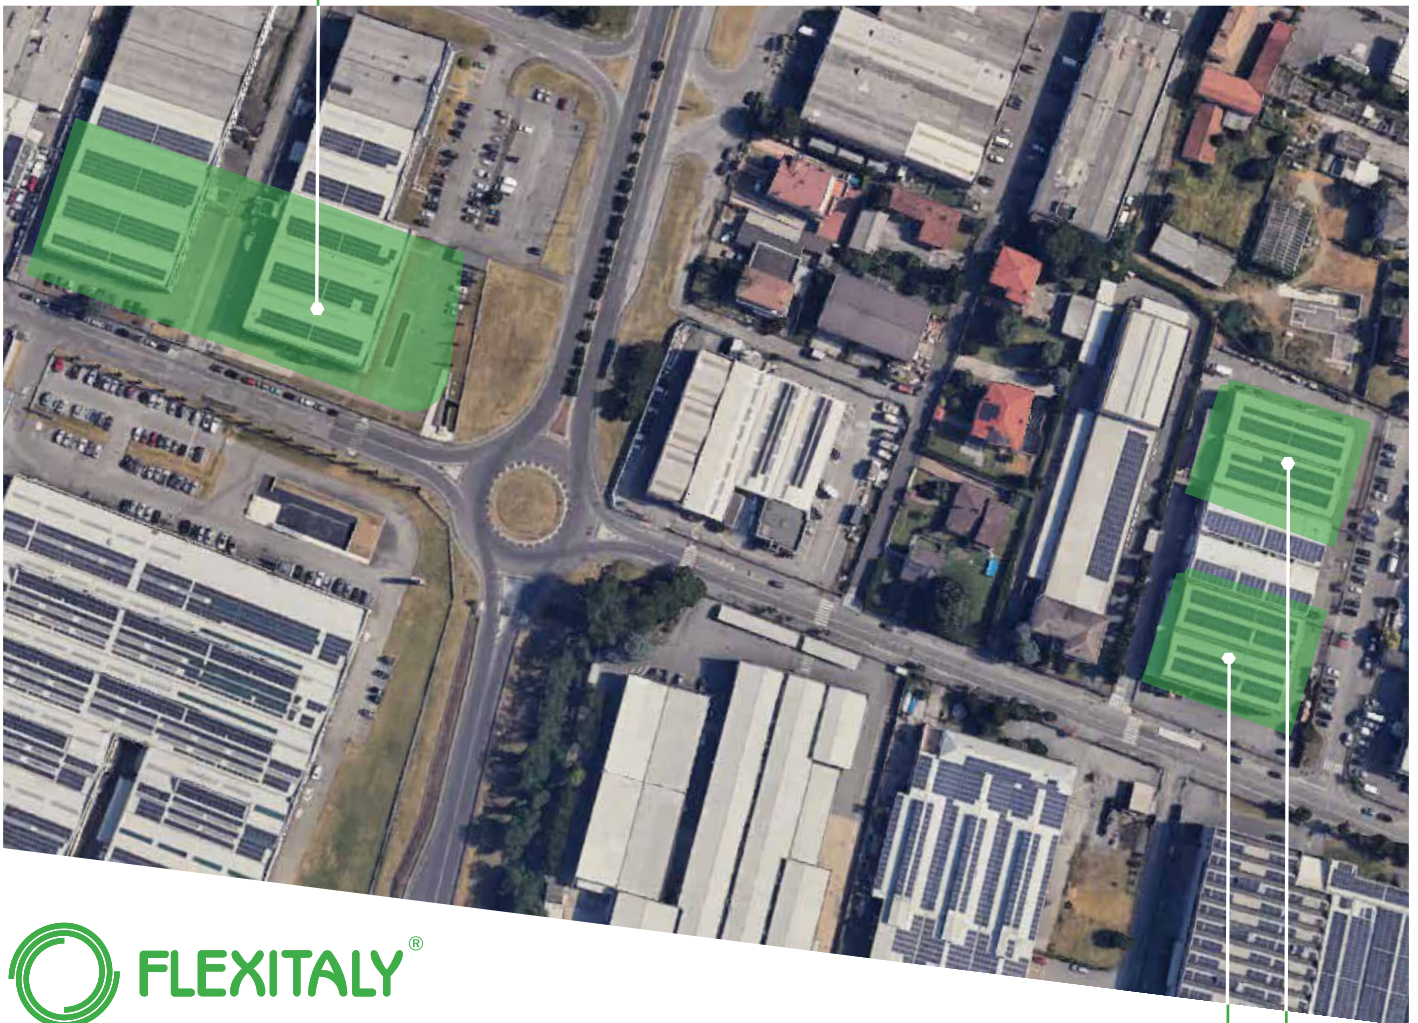

ASSEMBLAGGIO
ASSEMBLY

TRECCIATURA
BRAIDING

L'AZIENDA - THE COMPANY



**TORNI CNC CON ISOLE
ROBOTIZZATE**
**AUTOMATIC LATHES CNC
WITH ROBOTISED ISLE**

La precisione è la base
dei nostri progetti e segue
costantemente tutto il
ciclo produttivo.
Precision is the base of our
projects and constantly
follows all the productive
cycle.









**TRANSFER CON CARICO E
LAVORAZIONE SIMULTANEA
DI 2 BARRE
DOUBLE BAR TRANSFER
WITH LOAD AND
SIMULTANEOUS WORKING
OF 2 BARS**

Precisione e velocità
imbattibile per prodotti ad
alto consumo.
Precision and fastness,
unbeatable for high
consume products.



L'AZIENDA - THE COMPANY

REPARTO BOBINATURA

All'interno del nostro stabilimento produttivo, il reparto di bobinatura svolge un ruolo fondamentale nella preparazione dei materiali per le successive fasi di lavorazione.

La linea è composta da macchinari automatici e semiautomatici affidabili e collaudati, in grado di garantire una buona produttività e una notevole precisione operativa.

Grazie alla flessibilità delle attrezzature, possiamo gestire efficacemente diverse tipologie di materiali e formati, assicurando un avvolgimento uniforme e costante, indispensabile per mantenere elevati standard qualitativi. Ogni fase del processo viene seguita da personale esperto, con attenzione ai dettagli tecnici e al rispetto delle norme di produzione.

WIRES WINDING

Within our production facility, the winding department plays a key role in preparing materials for the next stages of processing.

The line is equipped with reliable and proven automatic and semi-automatic machines, capable of ensuring solid productivity and good operational precision.

Thanks to the flexibility of the equipment, we can efficiently handle various types of materials and formats, guaranteeing uniform and consistent winding, which is essential to maintain high-quality standards. Each phase of the process is overseen by experienced personnel, with close attention to technical details and compliance with production standards.



REPARTO TRECCIATURA

Il reparto di trecciatura è attrezzato con macchine a 24 e 32 fusi, che permettono di realizzare una copertura esterna resistente e uniforme su diversi tipi di tubi flessibili. Siamo in grado di lavorare una varietà di materiali tra cui acciaio inox AISI 304, nylon 6.6, acciaio zincato e polietilene, adattando il processo alle caratteristiche tecniche richieste.

Grazie alla competenza del nostro personale e al controllo costante durante la lavorazione, assicuriamo standard qualitativi elevati e una trecciatura precisa e affidabile, adatta sia ad applicazioni domestiche che professionali.

BRAIDING DEPARTMENT


The braiding department is equipped with 24- and 32- coils machines, designed to create a strong and uniform external braid on various types of flexible hoses. We are able to process a wide range of materials, including AISI 304 stainless steel, nylon 6.6, galvanized steel and polyethylene, adapting the process to the required technical specifications.

Thanks to the expertise of our staff and constant monitoring throughout the process, we ensure high quality standards and a precise, reliable braid suitable for both domestic and professional applications.



L'AZIENDA - THE COMPANY

PRE-ASSEMBLAGGIO AUTOMATICO COMPONENTI E
PRODUZIONE AUTOMATICA TUBI FLESSIBILI
COMPONENTS AUTOMATED PRE-ASSEMBLY AND FLEXIBLE
HOSES AUTOMATED PRODUCTION

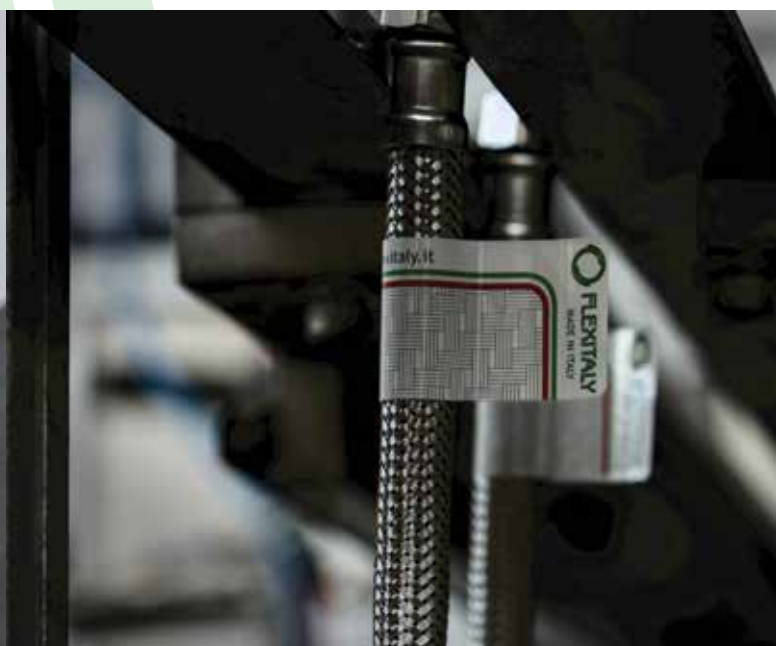





PRODUZIONE AUTOMATICA TUBI FLESSIBILI






FLEXIBLE HOSES AUTOMATED PRODUCTION



FLESSIBILI FLEXIBLES

DN 6

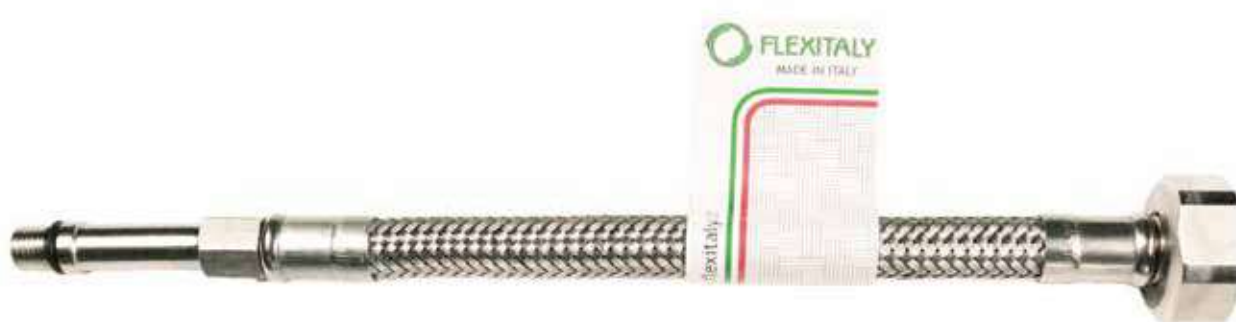


TUBI FLESSIBILI PER RUBINETTERIA - FLEXIBLE HOSES FOR FAUCETS

DATI TECNICI - TECHNICAL DATA

Tubo flessibile trecciato made in Italy in acciaio Inox AISI 304 con interno in gomma alimentare EPDM utilizzato per il collegamento tra la rete idrica e la rubinetteria sanitaria. Grazie alle dimensioni molto ridotte e alla pressatura su tutta la lunghezza della bussola, questo flessibile favorisce l'installazione su rubinetterie di qualsiasi design, specialmente quelle con un design molto minimale con degli spazi tecnici ridotti o poco accessibili. Tutti i flessibili sono raccordati con macchine automatiche ed il risultato è l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy braided hose in AISI 304 stainless steel with internal in non-toxic EPDM rubber, used for the connection between the water mains and the sanitary fittings. Thanks to the very small size and the pressing all along the entire length of the sleeve, this hose facilitates the installation on faucets of any design, especially on those with a very minimal design with reduced engineering spaces or not very accessible. All the hoses are produced with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

CARATTERISTICHE - FEATURES

						
TEMPERATURA MASSIMA D'IMPIEGO MAX OPERATING TEMPERATURE	TEMPERATURA D'ESERCIZIO WORKING TEMPERATURE	PRESSIONE D'ESERCIZIO WORKING PRESSURE	PORTATA A 3 BAR FLOW RATE AT 3 BAR	DIAMETRO Ø DIAMETER Ø	FORO MINIMO PASSAGGIO D'ACQUA FITTING INNER DIAMETER	RAGGIO CURVATURA MINIMO MINIMUM BENDING RADIUS
+70°C	-5°C - +90°C	10 BAR	19 lit/min	INTERNO INNER	ESTERNO OUTER	
				6 mm	10 mm	4,7 mm
						25 mm

MATERIALI - MATERIALS

TUBO HOSE		Treccia in acciaio INOX AISI 304. Tubo interno: gomma EPDM. Stainless steel INOX AISI 304 braid. Internal pipe: EPDM rubber.
RACCORDI FITTINGS		Ottone CW617N Brass CW617N
BUSSOLE SLEEVES		Acciaio INOX AISI 304 Stainless steel AISI 304

16002


Flessibile in Acciaio Inox AISI 304 - DN6 M10x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN6 M10x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

16004


Flessibile in Acciaio Inox AISI 304 - DN6 M10x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN6 M10x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

16502


Flessibile in Acciaio Inox AISI 304 - DN6 ML10x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN6 ML10x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

16504


Flessibile in Acciaio Inox AISI 304 - DN6 ML10x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN6 ML10x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

16802


Flessibile in Acciaio Inox AISI 304 - DN6 M8x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN6 M8x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

16804


Flessibile in Acciaio Inox AISI 304 - DN6 M8x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN6 M8x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

16902


Flessibile in Acciaio Inox AISI 304 - DN6 ML8x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN6 ML8x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

16904


Flessibile in Acciaio Inox AISI 304 - DN6 ML8x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN6 ML8x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

FLESSIBILI FLEXIBLES

DN 8





TUBI FLESSIBILI PER RUBINETTERIA - FLEXIBLE HOSES FOR FAUCETS

DATI TECNICI - TECHNICAL DATA

Tubo flessibile trecciato made in Italy in acciaio Inox AISI 304 con interno in gomma alimentare EPDM utilizzato per il collegamento tra la rete idrica e la rubinetteria sanitaria o cassette W.C. e adatto a qualsiasi altro impiego sanitario. Tutti i flessibili sono raccordati con macchine automatiche ed il risultato è l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy braided hose in AISI 304 stainless steel with internal in EPDM rubber, used for the connection between the water mains and the sanitary fittings or W.C. flushing tanks. All the hoses are produced with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

CARATTERISTICHE - FEATURES

						
TEMPERATURA MASSIMA D'IMPIEGO MAX OPERATING TEMPERATURE	TEMPERATURA D'ESERCIZIO WORKING TEMPERATURE	PRESSIONE D'ESERCIZIO WORKING PRESSURE	PORTATA A 3 BAR FLOW RATE AT 3 BAR	DIAMETRO Ø DIAMETER Ø	FORO MINIMO PASSAGGIO D'ACQUA FITTING INNER DIAMETER	RAGGIO CURVATURA MINIMO MINIMUM BENDING RADIUS
+70°C	-5°C - +90°C	10 BAR	29 lit/min	INTERNO INNER	ESTERNO OUTER	
				8 mm	12 mm	6mm
						30 mm

MATERIALI - MATERIALS

TUBO HOSE		Treccia in acciaio Inox AISI 304. Tubo interno: gomma EPDM. Stainless steel Inox AISI 304 braid. Internal pipe: EPDM rubber.
RACCORDI FITTINGS		Ottone CW617N Brass CW617N
BUSSOLE SLEEVES		Acciaio INOX AISI 304 Stainless steel AISI 304

17002


Flessibile in Acciaio Inox AISI 304 - DN8 M10x1 - 3/8°F.
Stainless Steel Flexible hose AISI 304 - DN8 M10x1 - 3/8°F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

17004


Flessibile in Acciaio Inox AISI 304 - DN8 M10x1 - 1/2°F.
Stainless Steel Flexible hose AISI 304 - DN8 M10x1 - 1/2°F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

17502


Flessibile in Acciaio Inox AISI 304 - DN8 ML10x1 - 3/8°F.
Stainless Steel Flexible hose AISI 304 - DN8 ML10x1 - 3/8°F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

17504


Flessibile in Acciaio Inox AISI 304 - DN8 ML10x1 - 1/2°F.
Stainless Steel Flexible hose AISI 304 - DN8 ML10x1 - 1/2°F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

175L02


Flessibile in Acciaio Inox AISI 304 - DN8 MXL10x1 - 3/8°F.
Stainless Steel Flexible hose AISI 304 - DN8 MXL10x1 - 3/8°F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

175L04


Flessibile in Acciaio Inox AISI 304 - DN8 MXL10x1 - 1/2°F.
Stainless Steel Flexible hose AISI 304 - DN8 MXL10x1 - 1/2°F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

17102


Flessibile in Acciaio Inox AISI 304 - DN8 M11x1 - 3/8°F.
Stainless Steel Flexible hose AISI 304 - DN8 M12x1 - 3/8°F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

17104


Flessibile in Acciaio Inox AISI 304 - DN8 M11x1 - 1/2°F.
Stainless Steel Flexible hose AISI 304 - DN8 M12x1 - 1/2°F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

DN 8

17202



Flessibile in Acciaio Inox AISI 304 - DN8 M12x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 M12x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

17204



Flessibile in Acciaio Inox AISI 304 - DN8 M12x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 M12x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

17702



Flessibile in Acciaio Inox AISI 304 - DN8 ML12x1 - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 ML12x1 - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

17704



Flessibile in Acciaio Inox AISI 304 - DN8 ML12x1 - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 ML12x1 - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100



FLESSIBILI FLEXIBLES DN 8




TUBI FLESSIBILI PER SANITARI - FLEXIBLE HOSES FOR SANITARY CONNECTIONS

DATI TECNICI - TECHNICAL DATA

Tubo flessibile trecciato made in Italy in acciaio Inox AISI 304 con interno in gomma alimentare EPDM utilizzato per il collegamento tra la rete idrica e la rubinetteria sanitaria o cassette W.C. e adatto a qualsiasi altro impiego sanitario. Tutti i flessibili sono raccordati con macchine automatiche ed il risultato è l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy braided hose in AISI 304 stainless steel with internal in EPDM rubber, used for the connection between the water mains and the sanitary fittings or W.C. flushing tanks. All the hoses are produced with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

CARATTERISTICHE - FEATURES

							
TEMPERATURA MASSIMA D'IMPIEGO MAX OPERATING TEMPERATURE	TEMPERATURA D'ESERCIZIO WORKING TEMPERATURE	PRESSIONE D'ESERCIZIO WORKING PRESSURE	PORTATA A 3 BAR FLOW RATE AT 3 BAR	DIAMETRO Ø DIAMETER Ø		FORO MINIMO PASSAGGIO D'ACQUA FITTING INNER DIAMETER	RAGGIO CURVATURA MINIMO MINIMUM BENDING RADIUS
+70°C	-5°C - +90°C	10 BAR	29 lit/min	INTERNO INNER	ESTERNO OUTER	6mm	30 mm

MATERIALI - MATERIALS

TUBO HOSE		Treccia in acciaio Inox AISI 304. Tubo interno: gomma EPDM. Stainless steel Inox AISI 304 braid. Internal pipe: EPDM rubber.
RACCORDI FITTINGS		Ottone CW617N Brass CW617N
BUSSOLE SLEEVES		Acciaio INOX AISI 304 Stainless steel AISI 304

1700205


Flessibile in Acciaio Inox AISI 304 - DN8 3/8" M - 3/8" F.
Stainless Steel Flexible hose AISI 304 - DN8 3/8" M - 3/8" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

1700202


Flessibile in Acciaio Inox AISI 304 - DN8 3/8" F - 3/8" F.
Stainless Steel Flexible hose AISI 304 - DN8 3/8" F - 3/8" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

1700204


Flessibile in Acciaio Inox AISI 304 - DN8 3/8" F - 1/2" F.
Stainless Steel Flexible hose AISI 304 - DN8 3/8" F - 1/2" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

1700405


Flessibile in Acciaio Inox AISI 304 - DN8 3/8" M - 1/2" F.
Stainless Steel Flexible hose AISI 304 - DN8 3/8" M - 1/2" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

1700207


Flessibile in Acciaio Inox AISI 304 - DN8 1/2" M - 3/8" F.
Stainless Steel Flexible hose AISI 304 - DN8 1/2" M - 3/8" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

1700407


Flessibile in Acciaio Inox AISI 304 - DN8 1/2" M - 1/2" F.
Stainless Steel Flexible hose AISI 304 - DN8 1/2" M - 1/2" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

170027L


Flessibile in Acciaio Inox AISI 304 - DN8 1/2" ML - 3/8" F.
Stainless Steel Flexible hose AISI 304 - DN8 1/2" ML - 3/8" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

170047L


Flessibile in Acciaio Inox AISI 304 - DN8 10B - 3/8" M.
Stainless Steel Flexible hose AISI 304 - DN8 10B - 3/8" M.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

DN 8

1700404



Flessibile in Acciaio Inox AISI 304 - DN8 1/2"F - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 1/2"F - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

1700605



Flessibile in Acciaio Inox AISI 304 - DN8 10B - 3/8"M.
Stainless Steel Flexible hose AISI 304 - DN8 10B - 3/8"M.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

1700602



Flessibile in Acciaio Inox AISI 304 - DN8 10B - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN8 10B - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

1700607



Flessibile in Acciaio Inox AISI 304 - DN8 10B - 1/2"M.
Stainless Steel Flexible hose AISI 304 - DN8 10B - 1/2"M.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

1700604



Flessibile in Acciaio Inox AISI 304 - DN8 10B - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN8 10B - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

170067L



Flessibile in Acciaio Inox AISI 304 - DN8 10B - 1/2"M.
Stainless Steel Flexible hose AISI 304 - DN8 10B - 1/2"M.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

17002C4



Flessibile in acciaio inox AISI 304 - DN10 3/8"F - 1/2"FC.
Stainless Steel Flexible hose AISI 304 - DN10 10B - 1/2"FC.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

17004C4



Flessibile in acciaio inox AISI 304 - DN10 1/2"F - 1/2"FC.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"F - 1/2"FC.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100



FLESSIBILI FLEXIBLES DN 10



TUBI FLESSIBILI PER SANITARI - FLEXIBLE HOSES FOR SANITARY CONNECTIONS

DATI TECNICI - TECHNICAL DATA

Tubo flessibile trecciato made in Italy in acciaio Inox AISI 304 con interno in gomma alimentare EPDM utilizzato prevalentemente per il collegamento tra la rete idrica e i rubinetti singoli, gli scaldabagni, le pareti doccia attrezzate e le vasche idromassaggio oltre che ai rubinetti posti sulle cucine industriali. Tutti i flessibili sono raccordati con macchine automatiche ed il risultato è l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy braided hose in AISI 304 stainless steel with internal in non-toxic EPDM rubber, mainly used for the connection between the water mains and the single faucet, the boilers, the equipped shower sets and the hydromassage tubs, besides the taps are placed on industrial kitchens. All the hoses are produced with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

CARATTERISTICHE - FEATURES

						
TEMPERATURA MASSIMA D'IMPIEGO MAX OPERATING TEMPERATURE	TEMPERATURA D'ESERCIZIO WORKING TEMPERATURE	PRESSIONE D'ESERCIZIO WORKING PRESSURE	PORTATA A 3 BAR FLOW RATE AT 3 BAR	DIAMETRO Ø DIAMETER Ø	FORO MINIMO PASSAGGIO D'ACQUA FITTING INNER DIAMETER	RAGGIO CURVATURA MINIMO MINIMUM BENDING RADIUS
+70°C	-5°C - +90°C	10 BAR	42 lit/min	INTERNO INNER	ESTERNO OUTER	
				10 mm	14 mm	7mm
						35 mm

MATERIALI - MATERIALS

TUBO HOSE		Treccia in acciaio Inox AISI 304. Tubo interno: gomma EPDM. Stainless steel Inox AISI 304 braid. Internal pipe: EPDM rubber.
RACCORDI FITTINGS		Ottone CW617N Brass CW617N
BUSSOLE SLEEVES		Acciaio INOX AISI 304 Stainless steel AISI 304

10038M38F


Flessibile in Acciaio Inox AISI 304 - DN10 3/8" M - 3/8" F.
Stainless Steel Flexible hose AISI 304 - DN10 3/8" M - 3/8" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10038F38F


Flessibile in Acciaio Inox AISI 304 - DN10 3/8" F - 3/8" F.
Stainless Steel Flexible hose AISI 304 - DN10 3/8" F - 3/8" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10038M12F


Flessibile in Acciaio Inox AISI 304 - DN10 3/8" M - 1/2" F.
Stainless Steel Flexible hose AISI 304 - DN10 3/8" M - 1/2" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10012M38F


Flessibile in Acciaio Inox AISI 304 - DN10 1/2" M - 3/8" F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2" M - 3/8" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10012F38F


Flessibile in Acciaio Inox AISI 304 - DN10 3/8" F - 1/2" F.
Stainless Steel Flexible hose AISI 304 - DN10 3/8" F - 1/2" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10012M12F


Flessibile in Acciaio Inox AISI 304 - DN10 1/2" M - 1/2" F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2" M - 1/2" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10012F12F


Flessibile in Acciaio Inox AISI 304 - DN10 1/2" F - 1/2" F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2" F - 1/2" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10012M34F


Flessibile in Acciaio Inox AISI 304 - DN10 1/2" M - 3/4" F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2" M - 3/4" F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

DN 10

10012F34F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"F - 3/4"F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"F - 3/4"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10034M34F



Flessibile in Acciaio Inox AISI 304 - DN10 3/4"M - 3/4"F.
Stainless Steel Flexible hose AISI 304 - DN10 3/4"M - 3/4"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10034F34F



Flessibile in Acciaio Inox AISI 304 - DN10 3/4"F - 3/4"F.
Stainless Steel Flexible hose AISI 304 - DN10 3/4"F - 3/4"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

100C12F12F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"F - 1/2"FC.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"F - 1/2"FC.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

100C12M12F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"M - 1/2"FC.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"M - 1/2"FC.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

100C12M34F



Flessibile in Acciaio Inox AISI 304 - DN10 1/2"M - 3/4"FC.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"M - 3/4"FC.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10538M38F



Flessibile in Acciaio Inox AISI 304 - DN10 3/8"ML - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN10 3/8"ML - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10538M12F



Flessibile in Acciaio Inox AISI 304 - DN10 3/8"ML - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN10 3/8"ML - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10512M38F



Flessibile in Acciao Inox AISI 304 - DN10 1/2"ML - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"ML - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10512M12F



Flessibile in Acciao Inox AISI 304 - DN10 1/2"ML - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN10 1/2"ML - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10638M



Flessibile in Acciao Inox AISI 304 - DN10 10B - 3/8"M.
Stainless Steel Flexible hose AISI 304 - DN10 10B - 3/8"M.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10638F



Flessibile in Acciao Inox AISI 304 - DN10 10B - 3/8"F.
Stainless Steel Flexible hose AISI 304 - DN10 10B - 3/8"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10612M



Flessibile in Acciao Inox AISI 304 - DN10 10B - 1/2"M.
Stainless Steel Flexible hose AISI 304 - DN10 10B - 1/2"M.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10612F



Flessibile in Acciao Inox AISI 304 - DN10 10B - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN10 10B - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

10612ML



Flessibile in Acciao Inox AISI 304 - DN10 10B - 1/2"ML.
Stainless Steel Flexible hose AISI 304 - DN10 10B - 1/2"ML.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100


106L12ML



Flessibile in Acciao Inox AISI 304 - DN10 10B - 1/2"ML.
Stainless Steel Flexible hose AISI 304 - DN10 10B - 1/2"ML.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

FLESSIBILI FLEXIBLES DN 13

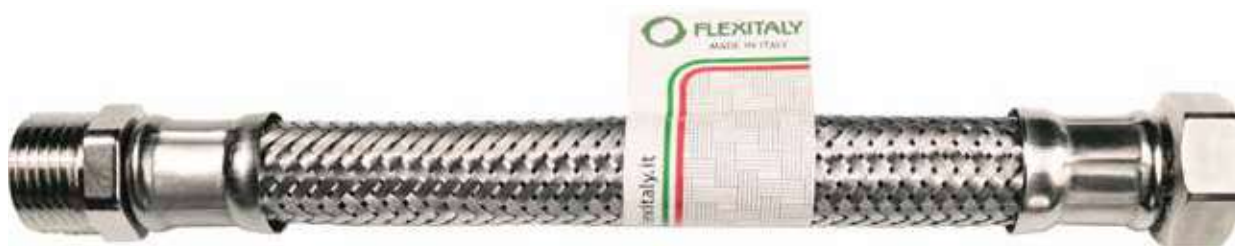


FLESSIBILI PER SCALDABAGNO, CALDAIE ED ELETTRODOMESTICI - FLEXIBLES HOSES FOR WATER HEATERS, BOILERS AND HOUSEHOLD APPLIANCES

DATI TECNICI - TECHNICAL DATA

Tubo flessibile trecciato made in Italy in acciaio Inox AISI 304 con interno in gomma alimentare EPDM utilizzato prevalentemente per il collegamento tra la rete idrica e i rubinetti singoli, gli scaldabagni, le pareti doccia attrezzate e le vasche idromassaggio oltre che ai rubinetti posti sulle cucine industriali. Tutti i flessibili sono raccordati con macchine automatiche ed il risultato è l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy braided hose in AISI 304 stainless steel with internal in non-toxic EPDM rubber, mainly used for the connection between the water mains and the single faucet, the boilers, the equipped shower sets and the hydromassage tubs, besides the taps are placed on industrial kitchens. All the hoses are produced with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

CARATTERISTICHE - FEATURES

						
TEMPERATURA MASSIMA D'IMPIEGO MAX OPERATING TEMPERATURE	TEMPERATURA D'ESERCIZIO WORKING TEMPERATURE	PRESSIONE D'ESERCIZIO WORKING PRESSURE	PORTATA A 3 BAR FLOW RATE AT 3 BAR	DIAMETRO Ø DIAMETER Ø	FORO MINIMO PASSAGGIO D'ACQUA FITTING INNER DIAMETER	RAGGIO CURVATURA MINIMO MINIMUM BENDING RADIUS
+70°C	-5°C - +90°C	10 BAR	65 lit/min	INTERNO INNER	ESTERNO OUTER	
				13 mm	18 mm	
						9,3 mm
						45 mm

MATERIALI - MATERIALS

TUBO HOSE		Treccia in acciaio Inox AISI 304. Tubo interno: gomma EPDM. Stainless steel Inox AISI 304 braid. Internal pipe: EPDM rubber.
RACCORDI FITTINGS		Ottone CW617N Brass CW617N
BUSSOLE SLEEVES		Acciaio Inox AISI 304 Stainless steel AISI 304

35012F12F



Flessibile in Acciaio Inox AISI 304 - DN13 1/2"F - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN13 1/2"F - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

35012F34F



Flessibile in Acciaio Inox AISI 304 - DN13 1/2"F - 3/4"F.
Stainless Steel Flexible hose AISI 304 - DN13 1/2"F - 3/4"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

35012M12F



Flessibile in Acciaio Inox AISI 304 - DN13 1/2"M - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN13 1/2"M - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

35012M34F



Flessibile in Acciaio Inox AISI 304 - DN13 1/2"M - 3/4"F.
Stainless Steel Flexible hose AISI 304 - DN13 1/2"M - 3/4"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

35034M34F



Flessibile in Acciaio Inox AISI 304 - DN13 3/4"M - 3/4"F.
Stainless Steel Flexible hose AISI 304 - DN13 3/4"M - 3/4"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

35034F34F



Flessibile in Acciaio Inox AISI 304 - DN13 3/4"F - 3/4"F.
Stainless Steel Flexible hose AISI 304 - DN13 3/4"F - 3/4"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

35512M12F



Flessibile in Acciaio Inox AISI 304 - DN13 1/2"ML - 1/2"F.
Stainless Steel Flexible hose AISI 304 - DN13 1/2"ML - 1/2"F.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

36012F12F



Flessibile in Acciaio Inox AISI 304 - DN13 1/2"F - 1/2"FC.
Stainless Steel Flexible hose AISI 304 - DN13 1/2"F - 1/2"FC.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

DN 13

36012F34F



Flessibile in Acciaio Inox AISI 304 - DN13 1/2" F - 3/4" FC.
Stainless Steel Flexible hose AISI 304 - DN13 1/2" F - 3/4" FC.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

36012M12F



Flessibile in Acciaio Inox AISI 304 - DN13 1/2" M - 1/2" FC.
Stainless Steel Flexible hose AISI 304 - DN13 1/2" M - 1/2" FC.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

36012M34F



Flessibile in Acciaio Inox AISI 304 - DN13 1/2" M - 3/4" FC.
Stainless Steel Flexible hose AISI 304 - DN13 1/2" M - 3/4" FC.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100

36034F34F



Flessibile in Acciaio Inox AISI 304 - DN13 3/4" F - 3/4" FC.
Stainless Steel Flexible hose AISI 304 - DN13 3/4" F - 3/4" FC.

cm	20	25	30	35	40	45	50	60	80	100
Conf. / Bag (Pcs)	10	10	10	10	10	10	10	10	10	10
Carton (Pcs)	200	200	200	200	200	200	200	200	100	100



WARRANTY 10 YEARS

WARRANTY 10 YEARS

FLESSIBILI ANTIVIBRANTI ANTI-VIBRATION FLEXIBLE HOSES



TRECCIATI IN ACCIAIO ZINCATO - GALVANIZED STEEL BRAIDED

DATI TECNICI - TECHNICAL DATA

Flessibili antivibranti made in Italy rivestiti con treccia in Acciaio Zincato ed interno in tubo in gomma alimentare EPDM utilizzati per il collegamento tra la rete idrica e pompe, caldaie, autoclavi e depuratori, sono disponibili nelle misure da 1/2" fino a 2". Tutti i flessibili sono raccordati con macchine automatiche ed il risultato è l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy anti-vibration flexible hoses, galvanized steel braided, with internal in non-toxic EPDM rubber, used for the connection between the water mains and pumps, boilers, autoclaves and water conditioner; available from 1/2" to 2" size. All the hoses are connected with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

CARATTERISTICHE - FEATURES

 DIAMETRO NOMINALE NOMINAL DIAMETER	 PRESSIONE D'ESERCIZIO WORKING PRESSURE	 PORTATA A 3 BAR FLOW RATE AT 3 BAR	 TEMPERATURA D'ESERCIZIO WORKING TEMPERATURE	 DIAMETRO Ø DIAMETER Ø		 FORO MINIMO PASSAGGIO D'ACQUA FITTING INNER DIAMETER	 RAGGIO CURVATURA MINIMO MINIMUM BENDING RADIUS
				INTERNO INNER	ESTERNO OUTER		
Tubo Dn13 - 1/2"	10 BAR	65 lit/min	-5°C - +90°C	13 mm	19 mm	9,3 mm	45 mm
Tubo Dn19 - 3/4"	10 BAR	120 lit/min	-5°C - +90°C	19 mm	27 mm	15 mm	70 mm
Tubo Dn25 - 1"	10 BAR	200 lit/min	-5°C - +90°C	25 mm	33 mm	20 mm	100 mm
Tubo Dn32 - 1"1/4	6 BAR	400 lit/min	-5°C - +90°C	30 mm	42 mm	26 mm	190 mm
Tubo Dn40 - 1"1/2	6 BAR	700 lit/min	-5°C - +90°C	40 mm	52 mm	32 mm	230 mm
Tubo Dn50 - 2"	6 BAR	1.050 lit/min	-5°C - +90°C	50 mm	62 mm	41 mm	300 mm

MATERIALI - MATERIALS

TUBO HOSE		Treccia in Acciaio Zincato. Tubo interno: gomma EPDM. Galvanized steel braid. Internal pipe: EPDM rubber.
RACCORDI FITTINGS		Ottone CW617N giallo o nichelato Brass CW617N yellow or nickel plated
BUSSOLE SLEEVES		Alluminio 99,5% Aluminium 99,5%

50212


Flessibile in Acciaio Zincato DN13 - Raccordi in Ottone giallo 1/2" M - 1/2" F.
Galvanized Steel Flexible Hose DN13 - Yellow brass fittings 1/2" M - 1/2" F.

502FF12


Flessibile in Acciaio Zincato DN13 - Raccordi in Ottone giallo 1/2" F - 1/2" F.
Galvanized Steel Flexible Hose DN13 - Yellow brass fittings 1/2" F - 1/2" F.

mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	100	100	100	100	100	100	100	100	100

50412


Flessibile in Acciaio Zincato DN13 - Raccordi in Ottone nichelato 1/2" M - 1/2" F.
Galvanized Steel Flexible Hose DN13 - Nickel-plated Brass Fittings 1/2" M - 1/2" F.

504FF12


Flessibile in Acciaio Zincato DN13 - Raccordi in Ottone nichelato 1/2" F - 1/2" F.
Galvanized Steel Flexible Hose DN13 - Nickel-plated Brass Fittings 1/2" F - 1/2" F.

mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	100	100	100	100	100	100	100	100	100

50234


Flessibile in Acciaio Zincato DN19 - Raccordi in Ottone giallo 3/4" M - 3/4" F.
Galvanized Steel Flexible Hose DN19 - Yellow brass fittings 3/4" M - 3/4" F.

502FF34


Flessibile in Acciaio Zincato DN19 - Raccordi in Ottone giallo 3/4" F - 3/4" F.
Galvanized Steel Flexible Hose DN19 - Yellow brass fittings 3/4" F - 3/4" F.

mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	50	50	50	50	50	50	50	50	50

50434


Flessibile in Acciaio Zincato DN19 - Raccordi in Ottone nichelato 3/4" M - 3/4" F.
Galvanized Steel Flexible Hose DN19 - Nickel-plated Brass Fittings 3/4" M - 3/4" F.

504FF34


Flessibile in Acciaio Zincato DN19 - Raccordi in Ottone nichelato 3/4" F - 3/4" F.
Galvanized Steel Flexible Hose DN19 - Nickel-plated Brass Fittings 3/4" F - 3/4" F.

mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	50	50	50	50	50	50	50	50	50

50210


Flessibile in Acciaio Zincato DN25 - Raccordi in Ottone giallo 1" M - 1" F.
Galvanized Steel Flexible Hose DN25 - Yellow brass fittings 1" M - 1" F.

502FF10


Flessibile in Acciaio Zincato DN25 - Raccordi in Ottone giallo 1" F - 1" F.
Galvanized Steel Flexible Hose DN25 - Yellow brass fittings 1" F - 1" F.

mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	50	50	50	50	50	50	50	50	50

50410


Flessibile in Acciaio Zincato DN25 - Raccordi in Ottone nichelato 1" M - 1" F.
Galvanized Steel Flexible Hose DN25 - Nickel-plated Brass Fittings 1" M - 1" F.

504FF10


Flessibile in Acciaio Zincato DN25 - Raccordi in Ottone nichelato 1" F - 1" F.
Galvanized Steel Flexible Hose DN25 - Nickel-plated Brass Fittings 1" F - 1" F.

mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	50	50	50	50	50	50	50	50	50

ANTIVIBRANTI - ANTI-VIBRATION

502114

Flessibile in Acciaio Zincato DN32 - Raccordi in Ottone giallo 1"1/4M - 1"1/4F.
Galvanized Steel Flexible Hose DN32 - Yellow brass fittings 1"1/4M - 1"1/4F.



502FF114

Flessibile in Acciaio Zincato DN32 - Raccordi in Ottone giallo 1"1/4F - 1"1/4F.
Galvanized Steel Flexible Hose DN32 - Yellow brass fittings 1"1/4F - 1"1/4F.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	30	30	30	30	30	30	30	30	30

502112

Flessibile in Acciaio Zincato DN40 - Raccordi in Ottone giallo 1"1/2M - 1"1/2F.
Galvanized Steel Flexible Hose DN40 - Yellow brass fittings 1"1/2M - 1"1/2F.



502FF112

Flessibile in Acciaio Zincato DN40 - Raccordi in Ottone giallo 1"1/2F - 1"1/2F.
Galvanized Steel Flexible Hose DN40 - Yellow brass fittings 1"1/2F - 1"1/2F.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	20	20	20	20	20	20	20	20	20

50220

Flessibile in Acciaio Zincato DN50 - Raccordi in Ottone giallo 2"M - 2"F.
Galvanized Steel Flexible Hose DN50 - Yellow brass fittings 2"M - 2"F.



502FF20

Flessibile in Acciaio Zincato DN50 - Raccordi in Ottone giallo 2"F - 2"F.
Galvanized Steel Flexible Hose DN50 - Yellow brass fittings 2"F - 2"F.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	15	15	15	15	15	15	15	15	15

504114

Flessibile in Acciaio Zincato DN32 - Raccordi in Ottone nichelato 1"1/4M - 1"1/4F.
Galvanized Steel Flexible Hose DN32 - Nickel-plated Brass Fittings 1"1/4M - 1"1/4F.



504FF114

Flessibile in Acciaio Zincato DN32 - Raccordi in Ottone nichelato 1"1/4F - 1"1/4F.
Galvanized Steel Flexible Hose DN32 - Nickel-plated Brass Fittings 1"1/4F - 1"1/4F.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	30	30	30	30	30	30	30	30	30

504112

Flessibile in Acciaio Zincato DN40 - Raccordi in Ottone nichelato 1"1/2M - 1"1/2F.
Galvanized Steel Flexible Hose DN40 - Nickel-plated Brass Fittings 1"1/2M - 1"1/2F.



504FF112

Flessibile in Acciaio Zincato DN40 - Raccordi in Ottone nichelato 1"1/2F - 1"1/2F.
Galvanized Steel Flexible Hose DN40 - Nickel-plated Brass Fittings 1"1/2F - 1"1/2F.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	20	20	20	20	20	20	20	20	20

50420

Flessibile in Acciaio Zincato DN50 - Raccordi in Ottone nichelato 2"M - 2"F.
Galvanized Steel Flexible Hose DN50 - Nickel-plated Brass Fittings 2"M - 2"F.



504FF20

Flessibile in Acciaio Zincato DN50 - Raccordi in Ottone nichelato 2"F - 2"F.
Galvanized Steel Flexible Hose DN50 - Nickel-plated Brass Fittings 2"F - 2"F.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	15	15	15	15	15	15	15	15	15

502MC12

Flessibile in Acciaio Zincato DN13 - Raccordi in Ottone giallo 1/2"M - 1/2"FC.
Galvanized Steel Flexible Hose DN13 - Yellow brass fittings 1/2"M - 1/2"FC.



502FC12

Flessibile in Acciaio Zincato DN13 - Raccordi in Ottone giallo 1/2"F - 1/2"FC.
Galvanized Steel Flexible Hose DN13 - Yellow brass fittings 1/2"F - 1/2"FC.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	100	100	100	100	100	100	100	100	100

502MC34

Flessibile in Acciaio Zincato DN19 - Raccordi in Ottone giallo 3/4"M - 3/4"FC.
Galvanized Steel Flexible Hose DN19 - Yellow brass fittings 3/4"M - 3/4"FC.



502FC34

Flessibile in Acciaio Zincato DN19 - Raccordi in Ottone giallo 3/4"F - 3/4"FC.
Galvanized Steel Flexible Hose DN19 - Yellow brass fittings 3/4"F - 3/4"FC.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	50	50	50	50	50	50	50	50	50

502MC10

Flessibile in Acciaio Zincato DN25 - Raccordi in Ottone giallo 1"M - 1"FC.
Galvanized Steel Flexible Hose DN25 - Yellow brass fittings 1"M - 1"FC.



502FC10

Flessibile in Acciaio Zincato DN25 - Raccordi in Ottone giallo 1"F - 1"FC.
Galvanized Steel Flexible Hose DN25 - Yellow brass fittings 1"F - 1"FC.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	30	30	30	30	30	30	30	30	30

504MC12

Flessibile in Acciaio Zincato DN13 - Raccordi in Ottone nichelato 1/2"M - 1/2"FC.
Galvanized Steel Flexible Hose DN13 - Nickel-plated Brass Fittings 1/2"M - 1/2"FC.



504FC12

Flessibile in Acciaio Zincato DN13 - Raccordi in Ottone nichelato 1/2"F - 1/2"FC.
Galvanized Steel Flexible Hose DN13 - Nickel-plated Brass Fittings 1/2"F - 1/2"FC.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	100	100	100	100	100	100	100	100	100

504MC34

Flessibile in Acciaio Zincato DN19 - Raccordi in Ottone nichelato 3/4"M - 3/4"FC.
Galvanized Steel Flexible Hose DN19 - Nickel-plated Brass Fittings 3/4"M - 3/4"FC.



504FC34

Flessibile in Acciaio Zincato DN19 - Raccordi in Ottone nichelato 3/4"F - 3/4"FC.
Galvanized Steel Flexible Hose DN19 - Nickel-plated Brass Fittings 3/4"F - 3/4"FC.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	50	50	50	50	50	50	50	50	50

504MC10

Flessibile in Acciaio Zincato DN25 - Raccordi in Ottone nichelato 1"M - 1"FC.
Galvanized Steel Flexible Hose DN25 - Nickel-plated Brass Fittings 1"M - 1"FC.



504FC10

Flessibile in Acciaio Zincato DN25 - Raccordi in Ottone nichelato 1"F - 1"FC.
Galvanized Steel Flexible Hose DN25 - Nickel-plated Brass Fittings 1"F - 1"FC.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	30	30	30	30	30	30	30	30	30

FLESSIBILI ANTIVIBRANTI INOX STAINLESS STEEL ANTI-VIBRATION FLEXIBLES



TRECCIA IN ACCIAIO INOX - STAINLESS STEEL BRAIDED

DATI TECNICI - TECHNICAL DATA

Flessibili antivibranti made in Italy rivestiti con treccia in Acciaio Inox AISI 304 ed interno in tubo in gomma alimentare EPDM utilizzati per il collegamento tra la rete idrica e pompe, caldaie, autoclavi e depuratori, sono disponibili nelle misure da 1/2" fino a 2". Tutti i flessibili sono raccordati con macchine automatiche ed il risultato è l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy anti-vibration flexible hoses, AISI 304 stainless steel braided, with internal in non-toxic EPDM rubber, used for the connection between the water mains and pumps, boilers, autoclaves and water conditioner; available from 1/2" to 2" size. All the hoses are connected with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

CARATTERISTICHE - FEATURES

 DIAMETRO NOMINALE NOMINAL DIAMETER	 PRESSIONE D'ESERCIZIO WORKING PRESSURE	 PORTATA A 3 BAR FLOW RATE AT 3 BAR	 TEMPERATURA D'ESERCIZIO WORKING TEMPERATURE	 DIAMETRO Ø DIAMETER Ø		 FORO MINIMO PASSAGGIO D'ACQUA FITTING INNER DIAMETER	 RAGGIO CURVATURA MINIMO MINIMUM BENDING RADIUS
				INTERNO INNER	ESTERNO OUTER		
Tubo Dn13 - 1/2"	15 BAR	65 lit/min	-5°C - +90°C	13 mm	19 mm	9,3 mm	45 mm
Tubo Dn19 - 3/4"	15 BAR	120 lit/min	-5°C - +90°C	19 mm	27 mm	15 mm	70 mm
Tubo Dn25 - 1"	15 BAR	200 lit/min	-5°C - +90°C	25 mm	33 mm	20 mm	100 mm
Tubo Dn32 - 1"1/4	8 BAR	400 lit/min	-5°C - +90°C	30 mm	42 mm	26 mm	190 mm
Tubo Dn40 - 1"1/2	8 BAR	700 lit/min	-5°C - +90°C	40 mm	52 mm	32 mm	230 mm
Tubo Dn50 - 2"	6 BAR	1050 lit/min	-5°C - +90°C	50 mm	62 mm	41 mm	300 mm

MATERIALI - MATERIALS

TUBO HOSE		Treccia in Acciaio Inox AISI 304. Tubo interno: gomma EPDM. Braid in Steel AISI 304. Internal pipe: EPDM rubber.
RACCORDI FITTINGS		Ottone CW617N giallo o nichelato Brass CW617N yellow or nickel plated
BUSSOLE SLEEVES		Alluminio 99,5% Aluminium 99,5%

52212



Flessibile in Acciaio Inox DN13 - Raccordi in Ottone giallo 1/2"M - 1/2"F.
Stainless Steel Flexible Hose DN13 - Yellow brass fittings 1/2"M - 1/2"F.

522FF12



Flessibile in Acciaio Inox DN13 - Raccordi in Ottone nichelato 1/2"F - 1/2"F.
Stainless Steel Flexible Hose DN13 - Nickel-plated brass fittings 1/2"F - 1/2"F.

mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	100	100	100	100	100	100	100	100	100

52012



Flessibile in Acciaio Inox DN13 - Raccordi in Ottone nichelato 1/2"M - 1/2"F.
Stainless Steel Flexible Hose DN13 - Nickel-plated Brass Fittings 1/2"M - 1/2"F.

520FF12



Flessibile in Acciaio Inox DN13 - Raccordi in Ottone nichelato 1/2"F - 1/2"F.
Stainless Steel Flexible Hose DN13 - Nickel-plated Brass Fittings 1/2"F - 1/2"F.

mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	100	100	100	100	100	100	100	100	100

52234



Flessibile in Acciaio Inox DN19 - Raccordi in Ottone giallo 3/4"M - 3/4"F.
Stainless Steel Flexible Hose DN19 - Yellow brass fittings 3/4"M - 3/4"F.

522FF34



Flessibile in Acciaio Inox DN19 - Raccordi in Ottone giallo 3/4"F - 3/4"F.
Stainless Steel Flexible Hose DN19 - Yellow brass fittings 3/4"F - 3/4"F.

mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	50	50	50	50	50	50	50	50	50

52034



Flessibile in Acciaio Inox DN19 - Raccordi in Ottone nichelato 3/4"M - 3/4"F.
Stainless Steel Flexible Hose DN19 - Nickel-plated Brass Fittings 3/4"M - 3/4"F.

520FF34



Flessibile in Acciaio Inox DN19 - Raccordi in Ottone nichelato 3/4"F - 3/4"F.
Stainless Steel Flexible Hose DN19 - Nickel-plated Brass Fittings 3/4"F - 3/4"F.

mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	50	50	50	50	50	50	50	50	50

52210



Flessibile in Acciaio Inox DN25 - Raccordi in Ottone giallo 1"M - 1"F.
Stainless Steel Flexible Hose DN25 - Yellow brass fittings 1"M - 1"F.

522FF10



Flessibile in Acciaio Inox DN25 - Raccordi in Ottone giallo 1"F - 1"F.
Stainless Steel Flexible Hose DN25 - Yellow brass fittings 1"F - 1"F.

mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	50	50	50	50	50	50	50	50	50

52010



Flessibile in Acciaio Inox DN25 - Raccordi in Ottone nichelato 1"M - 1"F.
Stainless Steel Flexible Hose DN25 - Nickel-plated Brass Fittings 1"M - 1"F.

520FF10



Flessibile in Acciaio Inox DN25 - Raccordi in Ottone nichelato 1"F - 1"F.
Stainless Steel Flexible Hose DN25 - Nickel-plated Brass Fittings 1"F - 1"F.

mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	50	50	50	50	50	50	50	50	50

ANTIVIBRANTI - ANTI-VIBRATION


522114

Flessibile in Acciaio Inox DN32 - Raccordi in Ottone giallo 1/2"M - 1/2"F.
Stainless Steel Flexible Hose DN32 - Yellow brass fittings 1/2"M - 1/2"F.



522FF114


Flessibile in Acciaio Inox DN32 - Raccordi in Ottone giallo 1/2"F - 1/2"F.
Stainless Steel Flexible Hose DN32 - Yellow brass fittings 1/2"F - 1/2"F.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	30	30	30	30	30	30	30	30	30

522112

Flessibile in Acciaio Inox DN40 - Raccordi in Ottone giallo 3/4"M - 3/4"F.
Stainless Steel Flexible Hose DN40 - Yellow brass fittings 3/4"M - 3/4"F.



522FF112

Flessibile in Acciaio Inox DN40 - Raccordi in Ottone giallo 3/4"F - 3/4"F.
Stainless Steel Flexible Hose DN40 - Yellow brass fittings 3/4"F - 3/4"F.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	20	20	20	20	20	20	20	20	20

52220

Flessibile in Acciaio Inox DN50 - Raccordi in Ottone giallo 1"M - 1"F.
Stainless Steel Flexible Hose DN50 - Yellow brass fittings 1"M - 1"F.



522FF20

Flessibile in Acciaio Inox DN50 - Raccordi in Ottone giallo 1"F - 1"F.
Stainless Steel Flexible Hose DN50 - Yellow brass fittings 1"F - 1"F.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	15	15	15	15	15	15	15	15	15

520114

Flessibile in Acciaio Inox DN32 - Raccordi in Ottone nichelato 1/2"M - 1/2"F.
Stainless Steel Flexible Hose DN32 - Nickel-plated Brass Fittings 1/2"M - 1/2"F.



520FF114

Flessibile in Acciaio Inox DN32 - Raccordi in Ottone nichelato 1/2"F - 1/2"F.
Stainless Steel Flexible Hose DN32 - Nickel-plated Brass Fittings 1/2"F - 1/2"F.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	30	30	30	30	30	30	30	30	30

520112

Flessibile in Acciaio Inox DN40 - Raccordi in Ottone nichelato 3/4"M - 3/4"F.
Stainless Steel Flexible Hose DN40 - Nickel-plated Brass Fittings 3/4"M - 3/4"F.



520FF112

Flessibile in Acciaio Inox DN40 - Raccordi in Ottone nichelato 3/4"F - 3/4"F.
Stainless Steel Flexible Hose DN40 - Nickel-plated Brass Fittings 3/4"F - 3/4"F.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	20	20	20	20	20	20	20	20	20

52020

Flessibile in Acciaio Inox DN50 - Raccordi in Ottone nichelato 1"M - 1"F.
Stainless Steel Flexible Hose DN50 - Nickel-plated Brass Fittings 1"M - 1"F.



520FF20

Flessibile in Acciaio Inox DN50 - Raccordi in Ottone nichelato 1"F - 1"F.
Stainless Steel Flexible Hose DN50 - Nickel-plated Brass Fittings 1"F - 1"F.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	15	15	15	15	15	15	15	15	15

522MC12

Flessibile in Acciaio Inox DN13 - Raccordi in Ottone giallo 1/2"M - 1/2"FC.
Stainless Steel Flexible Hose DN13 - Yellow brass fittings 1/2"M - 1/2"FC.



522FC12

Flessibile in Acciaio Inox DN13 - Raccordi in Ottone giallo 1/2"F - 1/2"FC.
Stainless Steel Flexible Hose DN13 - Yellow brass fittings 1/2"F - 1/2"FC.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	100	100	100	100	100	100	100	100	100

520MC12

Flessibile in Acciaio Inox DN13 - Raccordi in Ottone nichelato 1/2"M - 1/2"FC.
Stainless Steel Flexible Hose DN13 - Nickel-plated Brass Fittings 1/2"M - 1/2"FC.



520FC12

Flessibile in Acciaio Inox DN13 - Raccordi in Ottone nichelato 1/2"F - 1/2"FC.
Stainless Steel Flexible Hose DN13 - Nickel-plated Brass Fittings 1/2"F - 1/2"FC.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	100	100	100	100	100	100	100	100	100

522MC34

Flessibile in Acciaio Inox DN19 - Raccordi in Ottone giallo 3/4"M - 3/4"FC.
Stainless Steel Flexible Hose DN19 - Yellow brass fittings 3/4"M - 3/4"FC.



522FC34

Flessibile in Acciaio Inox DN19 - Raccordi in Ottone giallo 3/4"F - 3/4"FC.
Stainless Steel Flexible Hose DN19 - Yellow brass fittings 3/4"F - 3/4"FC.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	50	50	50	50	50	50	50	50	50

520MC34

Flessibile in Acciaio Inox DN19 - Raccordi in Ottone nichelato 3/4"M - 3/4"FC.
Stainless Steel Flexible Hose DN19 - Nickel-plated Brass Fittings 3/4"M - 3/4"FC.



520FC34

Flessibile in Acciaio Inox DN19 - Raccordi in Ottone nichelato 3/4"F - 3/4"FC.
Stainless Steel Flexible Hose DN19 - Nickel-plated Brass Fittings 3/4"F - 3/4"FC.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	50	50	50	50	50	50	50	50	50

522MC10

Flessibile in Acciaio Inox DN25 - Raccordi in Ottone giallo 1"M - 1"FC.
Stainless Steel Flexible Hose DN25 - Yellow brass fittings 1"M - 1"FC.



522FC10

Flessibile in Acciaio Inox DN25 - Raccordi in Ottone giallo 1"F - 1"FC.
Stainless Steel Flexible Hose DN25 - Yellow brass fittings 1"F - 1"FC.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	30	30	30	30	30	30	30	30	30

520MC10

Flessibile in Acciaio Inox DN25 - Raccordi in Ottone nichelato 1"M - 1"FC.
Stainless Steel Flexible Hose DN25 - Nickel-plated Brass Fittings 1"M - 1"FC.



520FC10

Flessibile in Acciaio Inox DN25 - Raccordi in Ottone nichelato 1"F - 1"FC.
Stainless Steel Flexible Hose DN25 - Nickel-plated Brass Fittings 1"F - 1"FC.



mm	200	300	400	500	600	700	800	900	1000
Conf. / Bag (Pcs)	1	1	1	1	1	1	1	1	1
Carton (Pcs)	30	30	30	30	30	30	30	30	30

MANICHETTE GAS GPL LPG GAS FLEXIBLE HOSES



TUBI FLESSIBILI GAS GPL - LPG GAS FLEXIBLE HOSES

DATI TECNICI - TECHNICAL DATA

Tubo flessibile in PVC trecciato con acciaio inox. Prodotto idoneo per applicazioni gas (famiglia I, II, III), gas combustibili / GPL ed adatto ad installazioni domestiche come fornelli, lampade e bollitori a gas esterni. Sottostrato in PVC conforme a IMQ.

Marcatura e caratteristiche conformi a norma UNI7140.

PVC flexible pipe braided with stainless steel.

Product suitable to gas applications (I, II, III), fuel gas / LPG.

Designed for domestic installations such as cookers, gas lamps, and outdoor gas boilers. PVC inliner conform to IMQ norm.

Markings and technical features conform to UNI7140 norm.

IMPORTANTE - IMPORTANT

I TUBI GAS VANNO INSTALLATI SECONDO DISPOSIZIONI INDICATE DALLA NORMATIVA UNI7131, DA PERSONALE AUTORIZZATO E QUALIFICATO. SI RICORDA L'USO OBBLIGATORIO DI UN REGOLATORE DI PRESSIONE. EVENTUALI BOMBOLE O CONTENITORI DI GAS ESTERNI DEVONO ESSERE RIPARATE DA FONTI DI CALORE E RAGGI SOLARI. LA MANICHETTA DEVE TASSATIVAMENTE ESSERE SOSTITUITA IN BASE ALLA DATA DI SCADENZA INDICATA SULL'APPOSITA CHIAVETTA.	GAS PIPES MUST BE INSTALLED ACCORDING TO THE PROVISIONS RULED BY UNI7131 NORM, BY AUTHORIZED AND SPECIALIZED INSTALLERS. THE USE OF A PRESSURE REGULATOR IS MANDATORY. ANY EXTERNAL GAS CONTAINERS MUST BE PROTECTED FROM HEAT SOURCES AND SUNLIGHT. THE HOSE MUST BE REPLACED ACCORDING TO THE EXPIRATION DATE INDICATED ON THE CORRESPONDING KEY PLATE.				
		PRESSIONE D'ESERCIZIO WORKING PRESSURE		DIAMETRO Ø DIAMETER Ø	
		0,2 BAR	INTERNO INNER	ESTERNO OUTER	
		8mm	13 mm		

MATERIALI - MATERIALS

TUBO HOSE		Treccia in acciaio Inox AISI 304. Tubo interno: PVC. Stainless steel Inox AISI 304 braid. Internal pipe: PVC.
RACCORDI FITTINGS		Ottone CW617N o CW614N o acciaio AVP Brass CW617N o CW614N or AVP steel
BUSSOLE SLEEVES		Alluminio Ø 14 mm Aluminium Ø 14 mm

810FF

Manichetta GPL con raccordi in ottone, filetto sinistro.
LPG GAS pipe with brass fittings, left thread.



cm	40	45	50	60	70	80	90	100	120	150

810XFF

Manichetta GPL con raccordi in acciaio AVP, filetto sinistro.
LPG GAS pipe with AVP steel fittings, left thread.



cm	40	45	50	60	70	80	90	100	120	150

FLESSIBILI DOCCIA SHOWER FLEXIBLE HOSES



DATI TECNICI - TECHNICAL DATA

Flessibili per doccia made in Italy in svariati modelli e materiali, a soddisfazione di ogni necessità, sia tecnica, che estetica, che economica. Gli articoli in gamma vengono raccordati con doppia ghiera o ghiera e cono, in diverse lunghezze da cm 120 fino a cm 200. Disponibili a richiesta i fuori misura.

Made in Italy shower flexibles proposed in different models and materials, to face any possible need, both technical, aesthetic and economical. The articles in range are connected with double nut or nut and conical end, in different lengths from 120 cm up to 200 cm. Out of range size are available on request.



425AR

Flessibile doccia in pvc atossico retinato e ricoperto Grigio Metallizzato con attacco 1/2" Conico - 1/2" Conico con sistema antitorsione.

Shower flexible hose in atoxic pvc with net working and covered Metallised Gray with nut 1/2" conical - 1/2" conical with anti-swivelling system.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	30	30	30



425MTR

Flessibile doccia in pvc atossico retinato e ricoperto Grigio Metallizzato con attacco 1/2" Conico - 1/2" Ghiera.

Shower flexible hose in atoxic pvc with net working and covered Metallised Gray with nut 1/2" conical - 1/2" metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	30	30	30



425CR

Flessibile doccia in pvc atossico avvolto con piattina Cromata con attacco 1/2" Conico - 1/2" Ghiera.

Shower flexible hose in atoxic wrapped pvc with c.p. plate, with nut 1/2" conical - 1/2" metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	30	30	30



425DO

Flessibile doccia in pvc atossico retinato e ricoperto con pvc dorato con attacco 1/2" Conico - 1/2" Ghiera.

Shower flexible hose in atoxic pvc with net working and covered with golden pvc, with nut 1/2" conical - 1/2" metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	30	30	30



425NE

Flessibile per doccia retinato metallizzato in pvc atossico, con attacco doppio brillante conico, nero opaco.

Flexible hose for shower with net working metal colour, in atoxic pvc, with double conical shiny brilliant nut, matt black.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	30	30	30



425BI


Flessibile per doccia retinato metallizzato in pvc atossico, con attacco doppio brillante conico, bianco opaco.

Flexible hose for shower with net working metal colour, in atoxic pvc, with double conical shiny brilliant nut, matt white.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	30	30	30

FLESSIBILI DOCCIA - SHOWER FLEXIBLE HOSES


425BC



Flessibile doccia in pvc atossico modello "Biflex" bianco/cromo con attacco 1/2" Conico - 1/2" Ghiera.
Shower flexible hose in atoxic pvc "Biflex" type, white-chrome, with nut 1/2" conical - 1/2" metal ring..

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	30	30	30

425NC



Flessibile doccia in pvc atossico modello "Biflex" nero/cromo con attacco 1/2" Conico - 1/2" Ghiera.
Shower flexible hose in atoxic pvc "Biflex" type, black-chrome, with nut 1/2" conical - 1/2" metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	30	30	30

458GR



Flessibile doccia in EPDM atossico trecciato in Nylon Grigio con attacco 1/2" Conico - 1/2" Ghiera.
Braided shower flexible hose in atoxic EPDM in Gray Nylon, with nut 1/2" conical - 1/2" metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	40

458NE



Flessibile doccia in EPDM atossico trecciato in Nylon Nero con attacco 1/2" Conico - 1/2" Ghiera.
Braided shower flexible hose in atoxic EPDM in Black Nylon, with nut 1/2" conical - 1/2" metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	40

458BI



Flessibile doccia in EPDM atossico trecciato in Nylon Bianco con attacco 1/2" Conico - 1/2" Ghiera.
Braided shower flexible hose in atoxic EPDM in White Nylon, with nut 1/2" conical - 1/2" metal ring.


cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	40

458BRE



Flessibile doccia in pvc atossico retinato Bianco con attacco 1/2" Conico - 1/2" Ghiera.
Shower flexible hose in atoxic pvc White with nut 1/2" conical - 1/2" metal ring.


cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	40



405BC

Flessibile doccia in pvc atossico modello "Spiroflex" Bianco/Cromo con attacco 1/2" Conico - 1/2" Ghiera.
Shower flexible hose in atoxic pvc "Spiroflex" type, white/chrome, with nut 1/2" conical - 1/2" metal ring.


cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	30	30	30



405NC

Flessibile doccia in pvc atossico modello "Spiroflex" Nero/Cromo con attacco 1/2" Conico - 1/2" Ghiera.
Shower flexible hose in atoxic pvc "Spiroflex" type, black-chrome, with nut 1/2" conical - 1/2" metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	30	30	30



405NE

Flessibile doccia in pvc atossico modello "Spiroflex" Nero con attacco 1/2" Conico - 1/2" Ghiera.
Shower flexible hose in atoxic pvc "Spiroflex" type, black, with nut 1/2" conical - 1/2" metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	30	30	30



405BI

Flessibile doccia in pvc atossico modello "Spiroflex" Bianco con attacco 1/2" Conico - 1/2" Ghiera.
Shower flexible hose in atoxic pvc "Spiroflex" type, white, with nut 1/2" conical - 1/2" metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	30	30	30

FLESSIBILI DOCCIA ESTRAIBILE PULL-OUT FLEXIBLE HOSES



DATI TECNICI - TECHNICAL DATA

I flessibili estraibili made in Italy sono trecciati e raccordati per il miglior confort in cucina o nelle altre possibili installazioni. La gamma varia dai trecciati in acciaio inox o in nylon colorato fino agli inox ricoperti in pvc. Tutti i flessibili estraibili sono dotati di maschio girevole e attacco girevole antitorsione, per una maggiore praticità d'uso.

The pull-out Made in Italy hoses are braided and connected for the best comfort in the kitchen or in the other possible installations. The range varies from stainless steel, or colored nylon, braided hoses up to the stainless steel hoses covered in pvc. All the pull-out flexible hoses are equipped with a swivelling male and a swivelling anti-torsion connection, for the most practical use.

CARATTERISTICHE - FEATURES

DIAMETRO NOMINALE NOMINAL DIAMETER	PRESSIONE D'ESERCIZIO WORKING PRESSURE	TEMPERATURA D'ESERCIZIO WORKING TEMPERATURE	FORO MINIMO PASSAGGIO D'ACQUA FITTING INNER DIAMETER	RAGGIO CURVATURA MINIMO MINIMUM BENDING RADIUS
DN8	10 BAR	-5°C - +90°C	6 mm	30 mm

MATERIALI - MATERIALS

TUBO HOSE		Treccia in NYLON - Tubo interno: gomma EPDM NYLONB Braid - Internal pipe: EPDM rubber.
		Treccia Inox AISI 304 - Tubo interno: gomma EPDM Braid Stainless AISI 304 - Internal pipe: EPDM rubber.
RACCORDI FITTINGS		Ottone CW617N Brass CW617N
BUSSOLE SLEEVES		Acciaio Inox AISI 304 Stainless steel AISI 304



450GR

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Grigio con attacco girevole maschio M15x1 - 1/2" Conico.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Gray Nylon with male swivelling nut M15x1 - 1/2" Conical.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	40



450GRAT

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Grigio con attacco girevole maschio M15x1 - 1/2" Conico Antitorsione.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Gray Nylon with male swivelling nut M15x1 - 1/2" Conical Anti-torsion.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	40



450NE

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Nero con attacco girevole maschio M15x1 - 1/2" Conico.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Black Nylon with male swivelling nut M15x1 - 1/2" Conical.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	40



450NEAT

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Nero con attacco girevole maschio M15x1 - 1/2" Conico Antitorsione.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Black Nylon with male swivelling nut M15x1 - 1/2" Conical Anti-torsion.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	40



450BI

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Bianco con attacco girevole maschio M15x1 - 1/2" Conico.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in White Nylon with male swivelling nut M15x1 - 1/2" Conical.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	40



450BIAT

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Bianco con attacco girevole maschio M15x1 - 1/2" Conico Antitorsione.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in White Nylon with male swivelling nut M15x1 - 1/2" Conical Anti-torsion.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	40

FLESSIBILI DOCCIA ESTRAIBILE - PULL-OUT FLEXIBLE HOSES

450IN



Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Acciaio Inox AISI 304 con attacco girevole maschio M15x1 - 1/2" Conico.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Stainless Steel AISI 304, with male swivelling nut M15x1 - 1/2" Conical.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30

450INAT



Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Acciaio Inox AISI 304 con attacco girevole maschio M15x1 - 1/2" Conico Antitorsione.

Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Stainless Steel AISI 304, with male swivelling nut M15x1 - 1/2" Conical Anti-torsion.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30

450NX



Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Nero/Acciaio Inox con attacco girevole maschio M15x1 - 1/2" Conico.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Black/Stainless Steel Nylon with male swivelling nut M15x1 - 1/2" Conical.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30

450NXAT



Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Nero/Acciaio Inox con attacco girevole maschio M15x1 - 1/2" Conico Antitorsione.

Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Black/Stainless Steel Nylon with male swivelling nut M15x1 - 1/2" Conical Anti-torsion.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30

450FN



Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Nero con fantasia in Acciaio Inox con attacco girevole maschio M15x1 - 1/2" Conico.

Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Black/Stainless Steel Fantasy Nylon with male swivelling nut M15x1 - 1/2" Conical.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30

450FNAT



Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Nero con fantasia in Acciaio Inox con attacco girevole maschio M15x1 - 1/2" Conico Antitorsione.

Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Black/Stainless Steel Fantasy Nylon with male swivelling nut M15x1 - 1/2" Conical Anti-torsion.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30



450BX

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Bianco/Acciaio Inox con attacco girevole maschio M15x1 - 1/2" Conico.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in White/Stainless Steel Nylon with male swivelling nut M15x1 - 1/2" Conical.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30



450BXAT

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Bianco/Acciaio Inox con attacco girevole maschio M15x1 - 1/2" Conico Antitorsione.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in White/Stainless Steel Nylon with male swivelling nut M15x1 - 1/2" Conical Anti torsion.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30



450FB

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Bianco con fantasia in Acciaio Inox con attacco girevole maschio M15x1 - 1/2" Conico.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in White/Stainless Steel Fantasy Nylon with male swivelling nut M15x1 - 1/2" Conical.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30



450FBAT

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Bianco con fantasia in Acciaio Inox con attacco girevole maschio M15x1 - 1/2" Conico Antitorsione.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in White/Stainless Steel Fantasy Nylon with male swivelling nut M15x1 - 1/2" Conical Anti torsion.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30

FLESSIBILI PER MONOFORO ONE-HOLE MIXERS FLEXIBLE HOSES



DATI TECNICI - TECHNICAL DATA

I flessibili estraibili made in Italy sono trecciati e raccordati per il miglior confort nella rubinetteria bordo vasca o nelle altre possibili installazioni con attacco doccia girevole. La gamma varia dai trecciati in acciaio inox o in nylon colorato fino agli inox ricoperti in pvc. Tutti i flessibili estraibili sono dotati di maschio girevole antitorsione, per una maggiore praticità d'uso.

The pull-out flexible hoses are braided and connected for the best comfort in the deck bath/shower mixers or in the other possible installations with swivable shower nut. The range goes from stainless steel braided hoses or in coloured nylon to the stainless steel hoses covered in pvc. All the pull-out flexible hoses are equipped with a swivable anti-torsion male, for a better use.

CARATTERISTICHE - FEATURES

DIAMETRO NOMINALE NOMINAL DIAMETER	PRESSIONE D'ESERCIZIO WORKING PRESSURE	TEMPERATURA D'ESERCIZIO WORKING TEMPERATURE	FORO MINIMO PASSAGGIO D'ACQUA FITTING INNER DIAMETER	RAGGIO CURVATURA MINIMO MINIMUM BENDING RADIUS
DN8	10 BAR	-5°C - +90°C	6 mm	30 mm

MATERIALI - MATERIALS

TUBO HOSE		Treccia in NYLON - Tubo interno: gomma EPDM NYLONB Braid - Internal pipe: EPDM rubber.
		Treccia Inox AISI 304 - Tubo interno: gomma EPDM Braid Stainless AISI 304 - Internal pipe: EPDM rubber.
RACCORDI FITTINGS		Ottone CW617N Brass CW617N
BUSSOLE SLEEVES		Acciaio Inox AISI 304 Stainless steel AISI 304



416GR

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Grigio con attacco girevole maschio M15x1 - 3/8" Ghiera.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Gray Nylon with male swivelling nut M15x1 - 3/8" Metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30



416NE

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Nero con attacco girevole maschio M15x1 - 3/8" Ghiera.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Black Nylon with male swivelling nut M15x1 - 3/8" Metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30



416BI

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Bianco con attacco girevole maschio M15x1 - 3/8" Ghiera.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in White Nylon with male swivelling nut M15x1 - 3/8" Metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30



416IN

Flessibile doccia estraibile per cucina, con intreno in EPDM atossico trecciato in Nylon Nero con attacco girevole maschio M15x1 - 3/8" Ghiera.
Kitchen pull-out flexible hose, braided atoxic EPDM inside, in Black Nylon with male swivelling nut M15x1 - 3/8" Metal ring.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	40	40	30

FLESSIBILI DOCCIA CROMATI CHROME PLATED SHOWER HOSES



DATI TECNICI - TECHNICAL DATA

Flessibili per doccia made in Italy in ottone cromato con interno in gomma alimentare EPDM. Gli articoli in gamma vengono raccordati con doppia ghiera o ghiera e attacco conico, in diverse lunghezze. Disponibili in versione antitorsione, estensibile e doppia graffatura.


Made in Italy quality shower flexibles made in chrome plated brass with internal hose in non-toxic EPDM rubber. The articles in range are connected with double nut or nut and conical end, in different lengths. Available in anti-torsion, extensible and double-clinching version.

445 INES

Flessibile perdoccia estensibile a doppia graffatura in acciaio INOX, tubo in EPDM, con attacco conico.
Flexible and extensible hose for shower, double clinching in stainless, EPDM rubber internal, with one conical nut.



1/2"F-1/2"F



cm	100 (130 ext.)	120 (160 ext.)	150 (195 ext.)	175 (230 ext.)	200 (245 ext.)
Conf. / Bag (Pcs)	1	1	1	1	1
Carton (Pcs)	50	50	40	40	30



1/2"F-1/2"F



445IN

Flessibile per doccia estraibile in acciaio INOX, tubo interno in gomma EPDM, attacco conico, 1/2".
Shower flexible hose in stainless steel, internal in EPDM rubber, one conical nut, 1/2".

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	50	40	40



M15"-1/2"F




460

Flessibile per doccia estraibile in ottone cromato, M15x1, 1/2" con attacco conico, tubo in EPDM.
Flexible in C.P. brass for pull-out spray shower, M15x1, 1/2" with one conical nut, EPDM rubber inside.

cm	120	150
Conf. / Bag (Pcs)	1	1
Carton (Pcs)	50	40



1/2"F-1/2"F



Girevole
antitorsione.
Anti-torsion
swivelling.

445DGAT

Flessibile per doccia estensibile a doppia graffatura in ottone, con sistema girevole ed anti-torsione, Ø 15 mm, tubo in EPDM con attacco conico.
Flexible and extensible hose for shower, in C.P. brass, Anti-torsion swivelling system, EPDM rubber inside with conical nut.

cm	120	150	200
Conf. / Bag (Pcs)	1	1	1
Carton (Pcs)	50	40	40



M15"-3/8"F



466

Flessibile per monofofo in ottone cromato M15x1-3"/8"F.
Flexible for one-hole mixers in c.p. brass M15x1-3"/8"F.

cm	150
Conf. / Bag (Pcs)	1
Carton (Pcs)	40

FLESSIBILI PER CARICO LAVATRICE IN ACCIAIO INOX STAINLESS STEEL WASHING MACHINE INLET FLEXIBLE HOSES



CARATTERISTICHE - FEATURES

DIAMETRO NOMINALE NOMINAL DIAMETER		PRESSIONE D'ESERCIZIO WORKING PRESSURE		TEMPERATURA D'ESERCIZIO WORKING TEMPERATURE		FORO MINIMO PASSAGGIO D'ACQUA FITTING INNER DIAMETER		RAGGIO CURVATURA MINIMO MINIMUM BENDING RADIUS	
DN13 X 18 mm		10 BAR		-5°C - +90°C		9,3 mm		45 mm	

MATERIALI - MATERIALS

TUBO HOSE		in Acciaio Inox AISI 304 Tubo interno: gomma EPDM. in steel INOX AISI 304 Internal pipe: EPDM rubber.
RACCORDI FITTINGS		Ottone CW617N Brass CW617N
BUSSOLE SLEEVES		Acciaio Inox AISI 304 Stainless steel AISI 304



65034F34F

Tubo di carico per lavatrice in treccia acciaio inox DN 13, 3/4F x 3/4F. Cm
Washing machine DN 13 stainless steel, 3/4F x 3/4F. Cm

cm	100	150	200	250	300
Conf. / Bag (Pcs)	1	1	1	1	1
Carton (Pcs)	10	10	10	10	10



65034F34F

Tubo di carico per lavatrice in treccia acciaio inox DN 13, con curveta.
3/4F x 3/4F. cm
Washing machine DN 13 stainless steel, with elbow pipe, 3/4F x 3/4F. cm

cm	100	150	200	250	300
Conf. / Bag (Pcs)	1	1	1	1	1
Carton (Pcs)	10	10	10	10	10

FLESSIBILI PER CARICO LAVATRICE IN PVC

PVC WASHING MACHINE INLET FLEXIBLE HOSES



CARATTERISTICHE - FEATURES

DIAMETRO NOMINALE NOMINAL DIAMETER		PRESSIONE D'ESERCIZIO WORKING PRESSURE		TEMPERATURA MASSIMA D'IMPIEGO WORKING TEMPERATURE	
DN10 X 15 mm		10 BAR		+22°C	

MATERIALI - MATERIALS

TUBO HOSE		PVC. PVC.
RACCORDI FITTINGS		NYLON. NYLON.
BUSSOLE SLEEVES		Acciaio Inox AISI 304 Stainless steel AISI 304



630

Tubo di carico per lavatrice 3/4F x 3/4F. cm 100, 150, 200, 250, 300.
Washing machine inlet hoses 3/4F x 3/4F. cm 100, 150, 200, 250, 300.

cm	100	150	200	250	300
Conf. / Bag (Pcs)	1	1	1	1	1
Carton (Pcs)	10	10	10	10	10



640

Tubo di carico per lavatrice in treccia acciaio inox DN 13, con curveta. 3/4F x 3/4F. cm
Washing machine DN 13 stainless steel, with elbow pipe, 3/4F x 3/4F. cm

cm	100	150	200	250	300
Conf. / Bag (Pcs)	1	1	1	1	1
Carton (Pcs)	10	10	10	10	10



TUBI SCARICO LAVATRICE - WASHING MACHINE DRAIN PIPES



R305

Tubo di scarico per lavatrice, in plastica, spiralato.
Washing machine outlet hose, in plastic.

cm	100	150	200	250	300	350	400	500



R306ES

Tubo scarico lavatrice, in plastica estensibile da cm 60 a cm 200, da cm 70 a cm 270 ed a cm 120 a cm 400.
Extendable corrugate outlet hose for washing machine from cm 60 to cm 200, from cm 70 to cm 270 and from cm 120 to cm 400.

cm	60 (200 ext.)	70 (270 ext.)	120 (400 ext.)



R305SU

Supporto in plastica per art. 305.
Plastic elbow holder for art. 305.

RACCORDERIA IN OTTONE E TUBI DI RAME

BRASS FITTINGS AND COPPER TUBES



DATI TECNICI - TECHNICAL DATA

Vasta gamma di raccorderia Made in Italy tornita o stampata, in ottone giallo o cromato, per soddisfare le varie esigenze dell'impiantistica. Tutta la raccorderia viene lavorata su macchine italiane di ultima generazione a controllo numerico e il risultato è l'assoluta precisione di ogni pezzo prodotto.

Wide range of Made in Italy fittings, made from brass bar or from forging, in yellow brass or chrome-plated brass, to meet the many needs of the plumbing. All the fittings are produced on numerical control Italian machines of latest generation, served by robots, and the result is the absolute precision of each produced piece.



71110R0T5

Tubo in rame ricotto cromato in barre da 5 metri Ø: 10 mm, 12 mm, 14 mm.
Pipe in soft copper chrome plated in roll of 5 meters, Ø: 10 mm, 12 mm, 14 mm.

Ø	10	12	14

71110


Tubo in rame ricotto cromato in barre da 1 metro o 1,50 metri, Ø10 mm.
Pipe in soft copper chrome plated in roll of 1 meter or 1,5 meter, Ø10 mm.

mt	1	1,5

714


Tubo liscio in rame cromato Ø10 mm con cartella e dado da 1/2. cm 30, 35, 40, 50.

C.p. copper pipe Ø10 mm with nut 1/2.
cm 30, 35, 40, 50.

cm	30	35	40	50

71412F12F


Tubo liscio in rame cromato Ø10 mm con 2 cartelle e 2 dadi da 1/2. cm 30, 40, 50, 60.

C.p. copper pipe Ø10 mm with 2 nuts 1/2. cm 30, 40, 50, 60.

cm	30	35	40	50

714M10


Tubo liscio in rame cromato Ø10 mm con attacco filettato 10M x 1. cm 35, 45, 50, 60.

C.p. copper pipe Ø10 mm threaded 10M x 1. cm 35, 45, 50, 60.

cm	35	45	50	60

714F10


Tubo liscio in rame cromato Ø10 mm con attacco dado e bicono Ø10 mm. cm 35.

C.p. copper pipe Ø10 mm with nut and 3 pcs washers Ø10 mm. cm 35.

cm	35

725


Nipples con guarnizione in gomma, ranella ed anello tagliato in ottone. 3/8 x 10; 1/2 x 10.

Nipples with nut and 3 pcs washers. 3/8 x 10; 1/2 x 10.

Ø	3/8x10x10	1/2x10

725L


Nipples prolungato con guarnizione in gomma, ranella ed anello tagliato in ottone. 1/2 x 10.

Extended c.p. nipples with nut and 3 pcs washers. 1/2 x 10.

Ø	1/2x10

725D


Doppio nipple con guarnizioni in 3 pezzi. 3/8 x 10 x 10.

C.p. double nipple with nut and 3 pcs washers. 3/8 x 10 x 10.

Ø	3/8x10x10

RACCORDERIA IN OTTONE E TUBI DI RAME - BRASS FITTINGS AND COPPER TUBES

725F



Raccordo femmina completo con guarnizioni in 3 pezzi. 1/2 x 10 mm.
C.p. female connection with nut and 3 pcs washers. 1/2 x 10 mm.

Ø	1/2x10

717RA



Raccordo con guarnizioni in 3 pezzi. 3/8 x 10 mm.
C.p. nut with 3 pcs washers. 3/8 x 10 mm.

Ø	3/8x10

851



Gomito M.F. in ottone cromato.
Elbow M.F. in c.p. brass.

Ø	3/8"	1/2"	3/4"	1"

8510G



Gomito M.F. in ottone giallo.
Elbow M.F. in yellow brass.

Ø	3/8"	1/2"	3/4"	1"

852



Gomito F.F. in ottone cromato.
Elbow F.F. in c.p. brass.

Ø	3/8"	1/2"	3/4"	1"

8520G



Gomito F.F. in ottone giallo.
Elbow F.F. in yellow brass.

Ø	3/8"	1/2"	3/4"	1"

853



TE in ottone cromato.
Tee in chrome plated brass.

Ø	3/8"	1/2"	3/4"	1"

8530G



TE in ottone giallo.
Tee in yellow brass.

Ø	3/8"	1/2"	3/4"	1"

854

Manicotto FF in ottone cromato.
Sleeve FF in chrome plated brass.



Ø	3/8"	1/2"	3/4"	1"

8540G

Manicotto FF in ottone giallo.
Sleeve FF in yellow brass.



Ø	3/8"	1/2"	3/4"	1"

902

Prolunghe in ottone cromato con broccia.
C.p. brass extension.



1/2" x mm	10	15	20	25	30	40	50	60	80	100
3/4" x mm	10	15	20	25	30	40	50	60	80	100

9020G

Prolunghe in ottone giallo con broccia.
Yellow brass extension.



1/2" x mm	10	15	20	25	30	40	50	60	80	100
3/4" x mm	10	15	20	25	30	40	50	60	80	100

902P

Prolunghe in ottone cromato tipo pesante Ø27 mm, con broccia. 1/2".
C.p. brass extension Ø27 mm. 1/2".



1/2" x mm	10	15	20	25	30	40	50	60	80	100

902P0G

Prolunghe in ottone giallo tipo pesante Ø27 mm, con broccia. 1/2".
Yellow brass extension Ø27 mm. 1/2".



1/2" x mm	10	15	20	25	30	40	50	60	80	100

906

Prolunghe ridotte in ottone cromato.
Reduction piece round in c.p. brass.



Ø	3/8"x1/2"	1/2"x3/4"	3/4"x1"

9060G

Prolunghe ridotte in ottone giallo.
Reduction piece round in yellow brass.



Ø	3/8"x1/2"	1/2"x3/4"	3/4"x1"

RACCORDERIA IN OTTONE E TUBI DI RAME - BRASS FITTINGS AND COPPER TUBES

910

Manicotto ridotto FF in ottone cromato.
Reduction sleeve FF in c.p. brass.



Ø	3/8"x1/2"	1/2"x3/4"	3/4"x1"

9100G

Manicotto ridotto FF in ottone giallo.
Reduction sleeve FF in yellow brass.



Ø	3/8"x1/2"	1/2"x3/4"	3/4"x1"

911

Riduzioni esagonali in ottone cromato.
Hexagonal reduction piece in c.p. brass.



Ø	1/4"x3/8"	3/8"x1/2"	1/2"x3/4"	3/4"x1"

9110G

Riduzioni esagonali in ottone giallo.
Hexagonal reduction piece in yellow brass.



Ø	1/4"x3/8"	3/8"x1/2"	1/2"x3/4"	3/4"x1"

915

Viti doppie ridotte in ottone cromato.
Double reducing nipple in c.p. brass.



Ø	3/8"x1/2"	1/2"x3/4"	3/4"x1"

9150G

Viti doppie ridotte in ottone giallo.
Double reducing nipple in yellow brass.



Ø	3/8"x1/2"	1/2"x3/4"	3/4"x1"

920

Viti doppie in ottone cromato.
Double nipple in c.p. brass.



Ø	3/8"	1/2"	3/4"	1"

9200G

Viti doppie in ottone giallo.
Double nipple in yellow brass.



Ø	3/8"	1/2"	3/4"	1"

923

Tappi esagonali in ottone cromato.
Hexagonal plug in c.p. brass.



Ø	3/8"	1/2"	3/4"	1"

9230G

Tappi esagonali in ottone giallo.
Hexagonal plug in yellow brass.



Ø	3/8"	1/2"	3/4"	1"

924

Calotte esagonali in ottone cromato.
Hexagonal cap in c.p. brass.



Ø	3/8"	1/2"	3/4"	1"

9240G

Calotte esagonali in ottone giallo.
Hexagonal cap in yellow brass.



Ø	3/8"	1/2"	3/4"	1"

92112

Vite doppia prolungata in ottone cromato.
Double nipple in c.p. brass.



mm/ Ø	36/1/2"

9210G12

Vite doppia prolungata in ottone giallo.
Double nipple in yellow brass.



mm/ Ø	36/1/2"

92112L

Vite doppia in ottone cromato.
Double nipple in c.p. brass.



mm/ Ø	50/1/2"

9210G12L

Vite doppia in ottone giallo.
Double nipple in yellow brass.



mm/ Ø	50/1/2"

ISTRUZIONI MONTAGGIO - INSTRUCTIONS

ISTRUZIONI MONTAGGIO INSTRUCTIONS

IL MANCATO RISPETTO DELLE ISTRUZIONI ESCLUDE IL PRODUTTORE DA OGNI RESPONSABILITÀ.

Il rispetto di tali indicazioni garantisce le caratteristiche dichiarate dei prodotti e ne assicura la completa affidabilità. Produttori e distributori sono tenuti alla conoscenza di queste istruzioni ed alla divulgazione agli utenti finali.

Non collegare la messa a terra dell'impianto elettrico al flessibile o ad altra condotta idraulica.

Chiudere l'impianto idraulico in caso di prolungata assenza.

Sostituire il flessibile in caso di piccole perdite e comunque entro i termini di garanzia.

THE MANUFACTURER'S LIABILITY IS EXCLUDED IN CASE OF DISRESPECT OF THESE INSTRUCTIONS.


Please refer to the following instructions for correct use, installation and perfect reliability of FLEXITALY s.r.l. flexible hoses. Manufacturers and distributors are required to inform end users accordingly.

Do not connect the electric grounding to the flexible hoses not to any other water piping.


Turn off the plumbing in case of long assemblance. Replace the hoses in case of leakage and anyway, always before the guarantee expiration.

RAGGIO MINIMO DI CURVATURA = RM
MINIMUM BEND RADIUS = RM

DN6	RM = 25 mm
DN8	RM = 30 mm
DN10	RM = 35 mm
DN13	RM = 45 mm

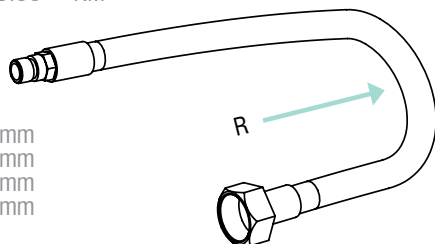


LASCIARE UN TRATTO RETTILINEO PRIMA DELLA CURVATURA $A = 2$ VOLTE IL DIAMETRO ESTERNO DEL FLESSIBILE.
A STRAIGHT PART OF 2 TIMES THE EXTERNAL DIAMETER MUST BE BEFORE THE HOSE BENDING $A = 2$ TIMES DIAMETER.

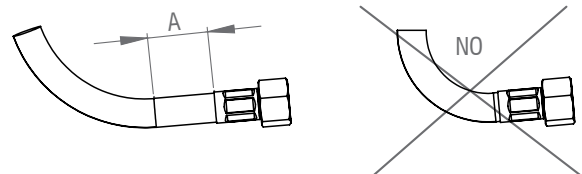


NON FORZARE L'INSERIMENTO DEL RUBINETTO NEGLI ATTACCHI A MURO. LA PARTE FILETTATA POTREBBE CRICCARSÌ DURANTE L'INSTALLAZIONE E CAUSARE PERDITE SUCCESSIVE.

DON'T FORCE THE FAUCET THREAD IN THE WALL CONNECTORS, THE THREAD COULD CRACK DURING INSTALLATION AND THEN IT CAN CAUSE LEAKS.


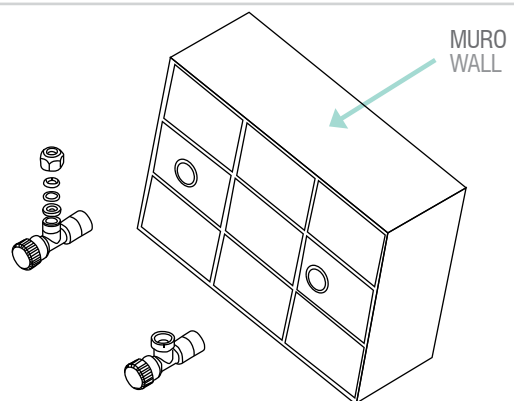


IL CONTATTO PROLUNGATO CON SOSTANZE, ANCHE LEGGERMENTE AGGRESSIVE, POTREBBE CAUSARE IL DANNEGGIAMENTO DEL RIVESTIMENTO A TRECCIA ED IL CONSEGUENTE SCOPPIO DEL FLESSIBILE.

PROLONGED CONTACT WITH ANY SUBSTANCES, EVEN SCARCELY AGGRESSIVE, COULD CAUSE EXTERNAL BRAID DAMAGE AND THE FLEXIBLE BURST.




NON INSERIRE I FLESSIBILI NEL MURO.
DON'T SET THE FLEXIBLE IN THE WALL

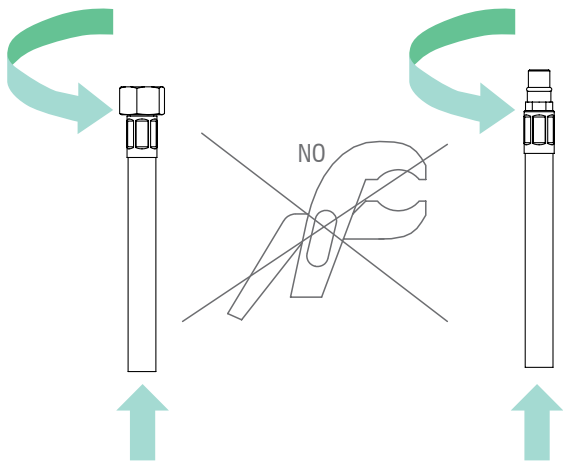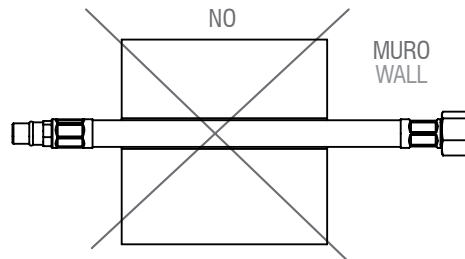


AVVITARE IL DADO A MANO E STRINGERE CON CHIAVE IDONEA 1/4 DI GIRO.
SCREW THE NUT BY HAND THAN USE AN APPROPRIATE WRENCH FOR 1/4 TURN.

AVVITARE A MANO I RACCORDI CON OR COPPIA MAX 3 Nm.
SCREW BY HAND THE CONNECTION MAXIMUM TORQUE 3 Nm.

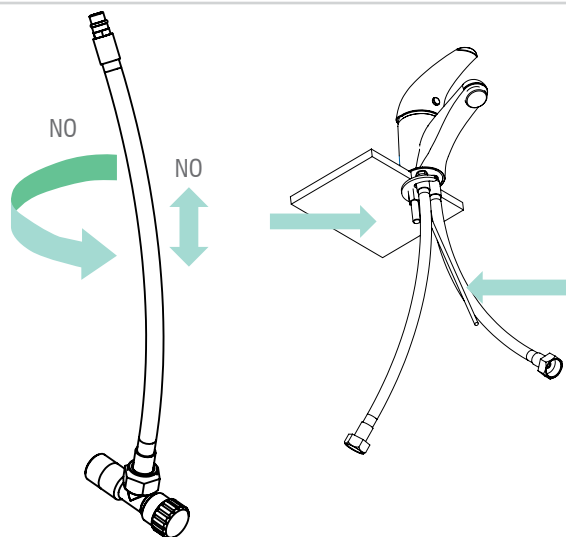

LASCIARE UN TRATTO RETTILINEO PRIMA DELLA CURVATURA $A = 2$ VOLTE IL DIAMETRO ESTERNO DEL FLESSIBILE.
A STRAIGHT PART OF 2 TIMES THE EXTERNAL DIAMETER MUST BE BEFORE THE HOSE BENDING $A = 2$ TIMES DIAMETER.

PRIMA DELL'INSTALLAZIONE VERIFICARE LA PRESENZA E L'INTEGRITA' DELLE GRAFFATURE ALLE 2 ESTREMITA' DEL FLESSIBILE.
CHECK THE CRIMPINGS ON THE 2 FLEXIBLE ENDS BEFORE INSTALLATION.

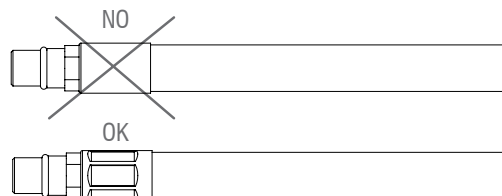

CONDIZIONI GENERALI DI VENDITA

ACCETTAZIONE ORDINI

Tutti gli ordini sono soggetti ad approvazione da parte della Casa Venditrice.
Con l'invio dell'ordine e il ritiro della merce, il Committente accetta le presenti condizioni generali.

PREZZI

I listini prezzi non sono vincolanti. Flexitaly si riserva il diritto di modificare i prezzi di vendita in qualsiasi momento e senza preavviso.

TERMINI DI CONSEGNA

Le date di consegna eventualmente indicate hanno carattere puramente indicativo e non vincolante.

Il Venditore si riserva la facoltà di effettuare consegne parziali.
Al momento della ricezione, le quantità devono essere verificate e ogni eventuale discrepanza annotata sul documento di trasporto con la dicitura "accettato con riserva". Eventuali spese di giacenza sono a carico del Committente.

SPEDIZIONI

La merce è fornita franco fabbrica (magazzino di partenza) e viaggia a rischio del Committente, salvo diverso accordo tra le Parti.

PAGAMENTI

Eventuali ritardi nei pagamenti comportano l'addebito di interessi al tasso vigente. Flexitaly si riserva la facoltà di sospendere gli ordini in corso in caso di irregolarità nei pagamenti.
Eventuali contestazioni o reclami non autorizzano in alcun modo il Committente a sospendere o trattenere i pagamenti.

RECLAMI E RESI

I reclami devono essere comunicati entro 7 giorni dal ricevimento della merce a mezzo raccomandata.
Trascorso tale termine non saranno accettati reclami né resi.
Ogni reso deve essere preventivamente autorizzato da Flexitaly, che fornirà le relative istruzioni.

CARATTERISTICHE TECNICHE

Flexitaly si riserva il diritto di apportare modifiche ai prodotti senza preavviso.

RISERVATO DOMINIO

La merce rimane di proprietà di Flexitaly fino al pagamento integrale del prezzo, in conformità con il Codice Civile italiano.

RESPONSABILITÀ

Flexitaly non fornisce alcuna garanzia in caso di uso errato o improprio dei propri prodotti.
Qualora la merce risultasse difettosa per vizi di fabbricazione, accertati mediante perizia, Flexitaly si riserva il diritto di sostituirla o accreditarne il valore, senza che ciò comporti in alcun caso ulteriori oneri o responsabilità.

FORO COMPETENTE

Per qualsiasi controversia il Foro competente è quello di Milano.
Stampato nel mese di Settembre 2025.

GENERAL TERMS AND SALES CONDITIONS

ORDERS ACCEPTANCE

All orders are subject to approval by the Seller.
By placing an order and collecting the goods, the Buyer accepts these terms and conditions.

PRICES

Price lists are not binding. Flexitaly reserves the right to update sales prices at any time without notice.

DELIVERY TIMES

Any delivery dates indicated are for reference only and not binding. Partial deliveries may be made.

Upon receipt, quantities must be checked and any discrepancies recorded on the delivery note with the remark "accepted with reservation." Any additional costs for storage are charged to the Buyer.

SHIPMENTS

Goods are supplied ex-works (warehouse of origin) and travel at the Buyer's own risk if not differently agreed by the Parts.

PAYMENTS

Late payments will accrue interest at the applicable rate. Flexitaly may suspend pending orders if irregularities in payment occur.
Any claims or disputes do not entitle the Buyer to withhold or suspend payments.

CLAIMS AND RETURNS

Claims must be submitted within 7 days of receipt of goods by registered letter.
No claims or returns will be accepted after this deadline.
All returns must be authorized in advance by Flexitaly which will provide specific instructions.

TECHNICAL FEATURES

Flexitaly reserves the right to make product modifications without prior notice.

RETENTION OF TITLE

Goods remain the property of Flexitaly until full payment has been received, in accordance with the Italian Civil Code.

LIABILITY

Flexitaly does not provide any warranty regarding the incorrect or improper use of its products.
Should the material prove defective due to manufacturing faults, duly recognized through expert assessment, Flexitaly reserves the right to replace it or credit its value, without in any case extending its liability to any further costs or obligations.

JURISDICTION

For any dispute, the competent court shall be Milan.
Printed in September 2025.



FLEXITALY S.r.l.
Via Leonardo da Vinci, 54G,
20062 Cassano d'Adda (MI) Italy
Tel. +39 0363 36 07 73 - Fax +39 0363 65 132
www.flexitaly.it - info@flexitaly.it
P.IVA IT 0817532015 - R.I. 08175320152